




**东莞市艾立克机械制造有限公司**  
ELITECORE MACHINERY MANUFACTURING CO.,LTD

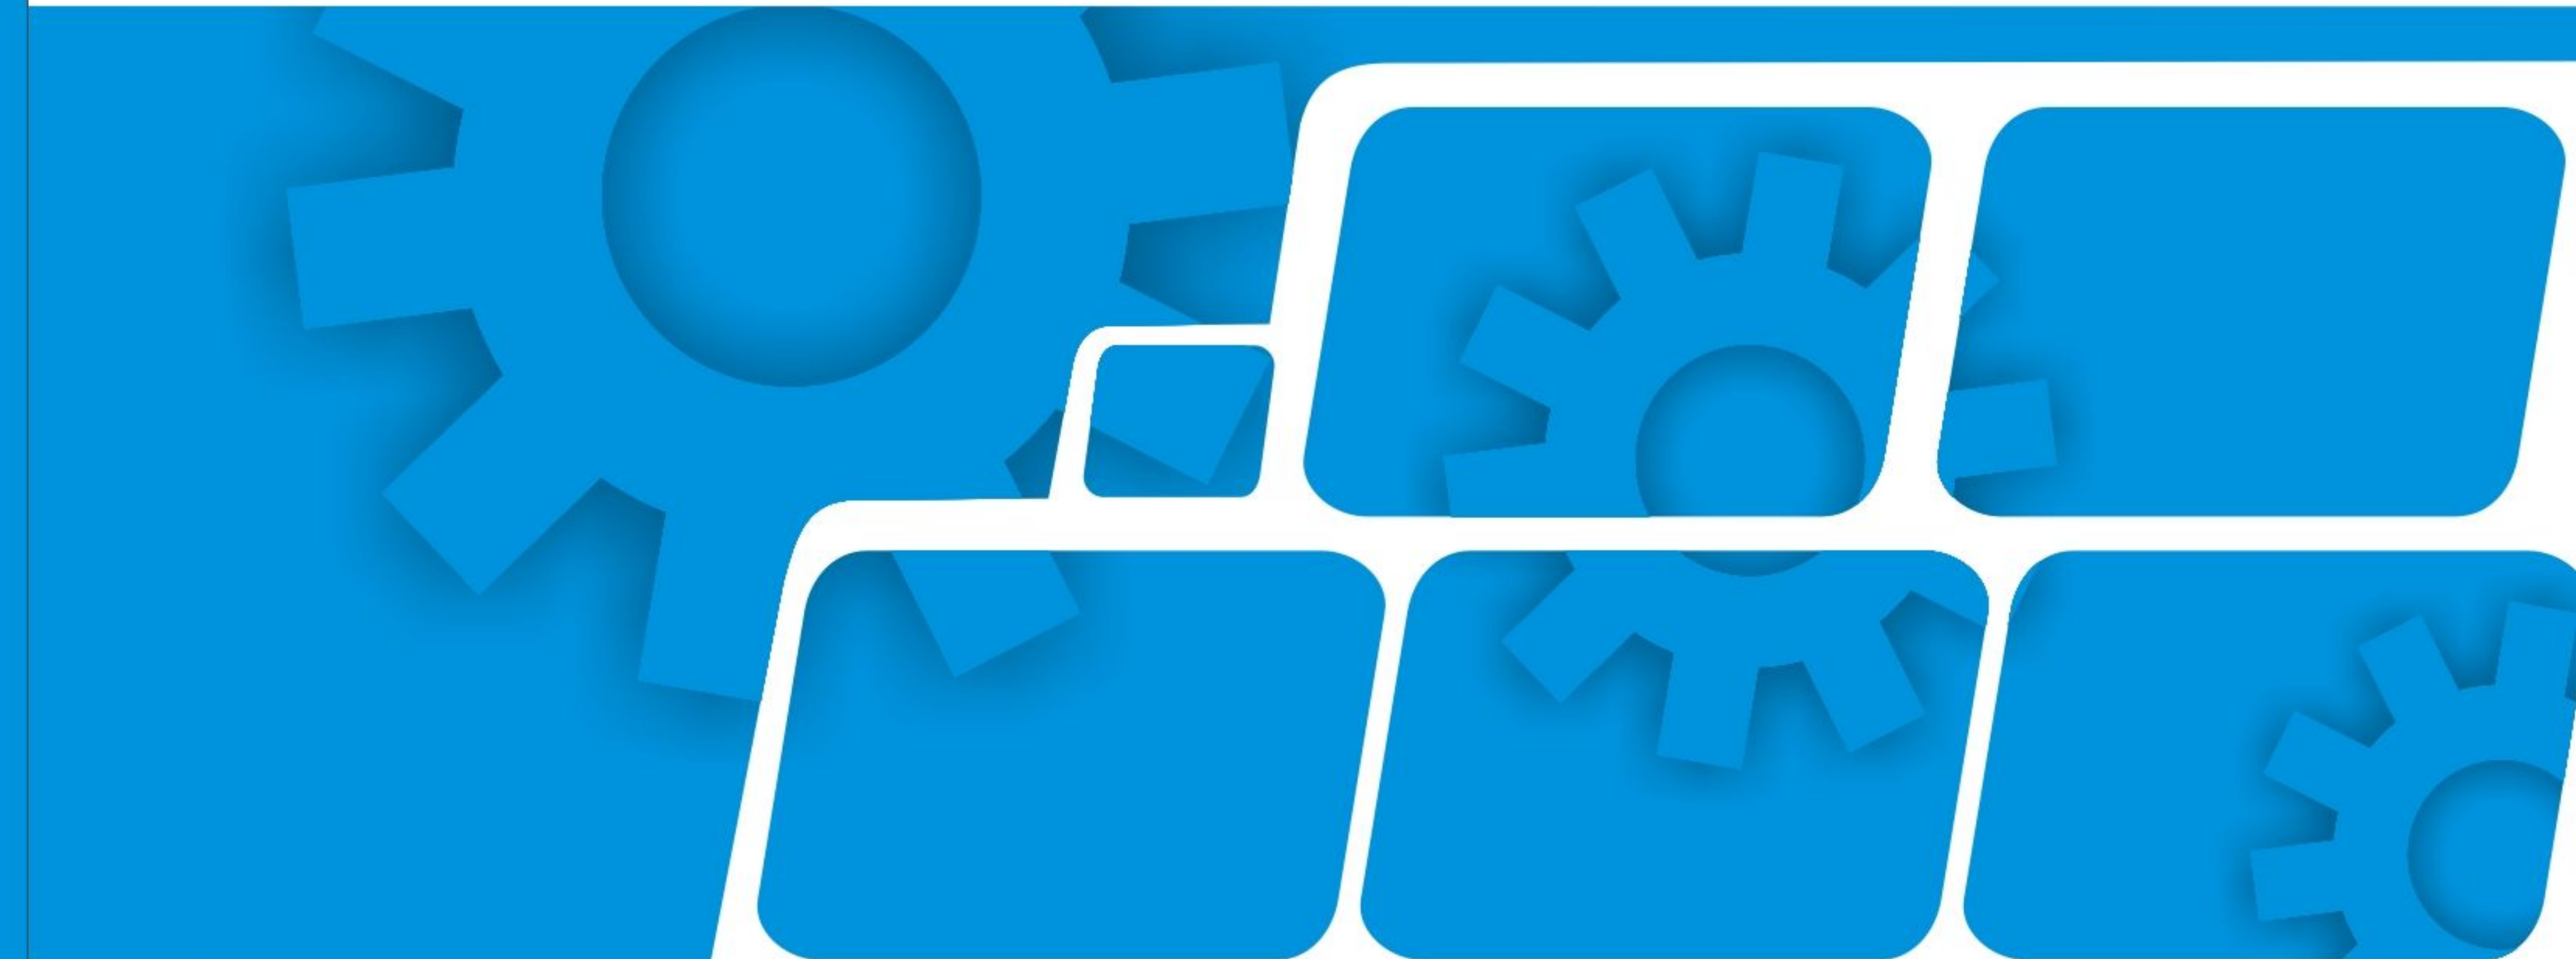

**聚氨酯泡绵机械**  
**POLYURETHANE FOAM MACHINERY**

**工厂地址：中国广东省东莞市万江区大汾社区杜上工业区大汾工业中心路**  
Factory ADD: Central Road Of DaFen Industry, DuShang Industrial Area, DaFen Community, WanJiang District, DongGuan City, GuangDong Province China.

**土耳其数控机工厂：**

Turkey CNC Factory ADD: ESENYURT/AKCABURGAZ MAHALLESİ 1992 SOKAK ALKOP  
SANAYİ SİTESİ A10 BLOK NO:3-4 İSTANBUL TÜRKİYE

邮政编码(Postcode): 523061 传真(Fax): +86-769-23179438

电话(Tel): +86-769-23179436 23179479 23175870 23175939

售后服务专线(After-sales Direct): +86-13662883537

邮箱(E-mail): sales@elitecoremachine.com Eaksu@elitecoremachine.com ( Turkey)

网址(Web): [Http://www.elitecoremachine.com](http://www.elitecoremachine.com)

[Http://www.elitecoremachinery.cn](http://www.elitecoremachinery.cn)

**打造中国泡绵机械第1品牌**  
TO MAKE ELITECORE FOAM MACHINE BRAND TOP WORLD WIDE



## 企业简介:

东莞市艾立克机械制造有限公司是一家集研发、制造和销售聚氨酯泡沫机械的专业生产厂家，产品远销非洲、美洲、欧洲及东南亚等100多个国家和地区，特别是在罗马尼亚、阿根廷、克罗地亚、阿联酋、约旦、尼日利亚、土耳其、埃及、赞比亚、迪拜、希腊、沙特阿拉伯、巴西、乌兹别克斯坦、印度、韩国、南非等国家提供了数十条全自动水平连续发泡生产线！

艾立克在国际市场上的销量处于同行业的领先水平，向国内外客户持续提供最优质的产品和服务。

## COMPANY PROFILE

EliteCore Machinery Manufacturing Co.Ltd is one of professional manufacturers with design, manufacture and sales polyurathane foam machinery. Our products are exported to more than one hundred countries such as: America, Europe and Southeast Asia, especially we sold dozens of Fully Automatic Continuous Foaming Machine to Romania, Argentina, Croatia, UAE, Jordan, Nigeria, Turkey, Egypt, Zambia, Dubai, Greece, Saudi Arabia, Brazil, Uzbekistan, India, Korea, South Africa etc !

Our Mission is to Deliver the Right Product at the Right Price at the Right Time, With Our Genuinely Service to Get Your Money's Worth.



## 企业文化 Company Culture

### 企业愿景:

打造中国泡沫机械第一品牌，成为世界同行知名品牌！

### 企业价值观:

具有爱心，品德高尚，为中国工业崛起的使命；学习创新，不断超越，无私奉献的团队精神。

### 企业使命:

“慧”集行业志同道合的精英干一件一生都干不完的泡沫机械事业

### 企业经营理念:

质量第一；  
服务第一；  
注重人才；  
不断进步；  
打造100年品牌企业！

# 品质缺陷，零容忍！

Quality Defects, zero tolerance!

企业使命: 打造中国泡沫机械第1品牌  
TO MAKE ELITECORE FOAM MACHINE BRAND TOP WORLD WIDE

## 客户见证 Customer Testimonials





**荣誉资质**  
**Honorary Certificate**




**目录 CONTENTS**

- 01 ECMT-100 全自动水平连续发泡生产线  
Fully-Automatic Continuous Foaming Machine
- 03 ECMT-131A 全自动箱式泡绵发泡机  
Fully-Auto Batch Foaming Machine
- 04 ECMT-131B 半自动箱式泡绵发泡机  
Semi-Auto Batch Foaming Machine
- 05 ECMT-101 手动泡绵发泡机(卧式)  
Manual Foam Mixing Machine(Seated Type)
- 05 ECMT-102 手动泡绵发泡机(立式)  
Manual Foam Mixing Machine(Vertical Type)
- 05 ECMT-139 手动小型泡绵立切机  
Small Vertical Foam Cutting Machine
- 06 ECMT-109 110 手动泡绵立切机  
Manual Vertical Foam Cutting Machine
- 06 ECMT-128 128B 半自动泡绵立切机  
Semi-Auto Vertical Foam Cutting Machine
- 07 ECMT-111 全自动泡绵立切机  
Fully-Auto Vertical Foam Cutting Machine
- 07 ECMT-115 115B 全自动路轨式泡绵平切机  
Automatic Foam Long Sheets Cutter
- 08 ECMT-104 105 全自动泡绵平切机  
Automatic Horizontal Foam Cutting Machine
- 08 ECMT-104B 105B 全自动吸风泡绵平切机  
Automatic Horizontal Foam Cutting Machine (With Vacuum System)
- 09 ECMT-104C 全自动医疗/化妆泡绵平切机(强力吸风装置)  
Automatic Medical/Makeup Foam Cutting Machine(With Vacuum System)
- 09 ECMT-107 108 108B 全自动圆盘泡绵平切机  
Automatic Circular Foam Cutting Machine
- 10 ECMT-135 136 全自动泡绵平切机(输送网带+强力吸风装置)  
Automatic Horizontal Foam Cutting Machine(Conveyor Belt+Vacuum System)
- 10 ECMT-137 137B 全自动再生绵平切机  
Automatic Rebonded Foam Cutting Machine
- 11 ECMT-138 全自动硬质泡沫平切机  
Automatic Phenolic/Rigid Foam Cutting Machine
- 11 ECMT-146 全自动泡绵多刀平切机  
Automatic Horizontal Foam Cutting Machine (Multicutter Type)
- 12 ECMT-116 全自动泡绵裁断机(锯齿)  
Automatic Foam Block Cutter(Cross Tooth Blade Type)
- 12 ECMT-114 114B 全自动泡绵异形机  
Automatic Profiles Foam Cutting Machine
- 13 ECMT-112A 数控异型切割机(线刀)  
CNC Contour Cutting Machine(Wire Type)
- 14 ECMT-112B 立式数控异型切割机(环刀)  
CNC Contour Cutting Machine(Vertical Knife Type)
- 15 ECMT-112C 数控异型切割机(环形刀片)  
CNC Contour Cutting Machine(Knife Type)
- 16 ECMT-112D 数控异型切割机(新型振刀)  
CNC Contour Cutting Machine(High-Precision Oscillating Blade Type)
- 17 ECMT-113 113B 手动泡绵仿形切割机  
Manual Foam Contour Cutting Machine
- 18 ECMT-118 泡绵接合机  
Foam Sheets Jointing Machine
- 18 ECMT-119 泡绵卷料打码机  
Foam Sheets Metering & Winding Machine
- 19 ECMT-122 泡绵贴合机  
Foam Laminating Machine
- 19 ECMT-144B 泡绵火焰贴合机  
Foam Laminating Machine(Flame Type)
- 20 ECMT-123 自动泡绵圆切机  
Automatic Foam Peeling Machine
- 20 ECMT-124 卧式泡绵打孔机  
Horizontal Foam Boring Machine
- 21 ECMT-125 立式泡绵打孔机  
Vertical Foam Boring Machine
- 21 ECMT-125B 立式泡绵打孔切顶机  
Vertical Foam Boring & Top Cutting Machine
- 22 ECMT-126 普通再生绵机  
Re-bonded Foam Making Machine
- 22 ECMT-141 蒸汽再生绵机  
Re-bonded Foam Making Machine(With Steam System)
- 23 ECMT-141B 全自动蒸汽再生绵生产线  
Fully-Auto Re-bonded Foam Making Machine(With Steam System)
- 23 ECMT-127 泡绵边角料破碎机  
Scrap Foam Shredding Machine
- 24 ECMT-127C 多功能型强力泡绵边角料破碎机  
Heavy-Duty Scrap Foam Shredding Machine(Multifunction)
- 24 ECMT-147 泡绵冲孔机  
Foam Hole Punching Machine
- 25 ECMT-133 泡绵储存输送系统  
Foam Storage Rack System
- 25 ECMT-132 泡绵夹具  
Crane Unit
- 25 ECMT-142 泡绵压缩打包机  
Foam Mattress Compress & Packing Machine
- 26 ECMT-145 泡绵压缩破泡机  
Foam Exhausting Machine
- 26 ECMT-206B 床垫围边机  
Tape Edge Machine



ECMT-100 全自动水平连续发泡生产线  
Fully-Automatic Continuous Foaming Machine

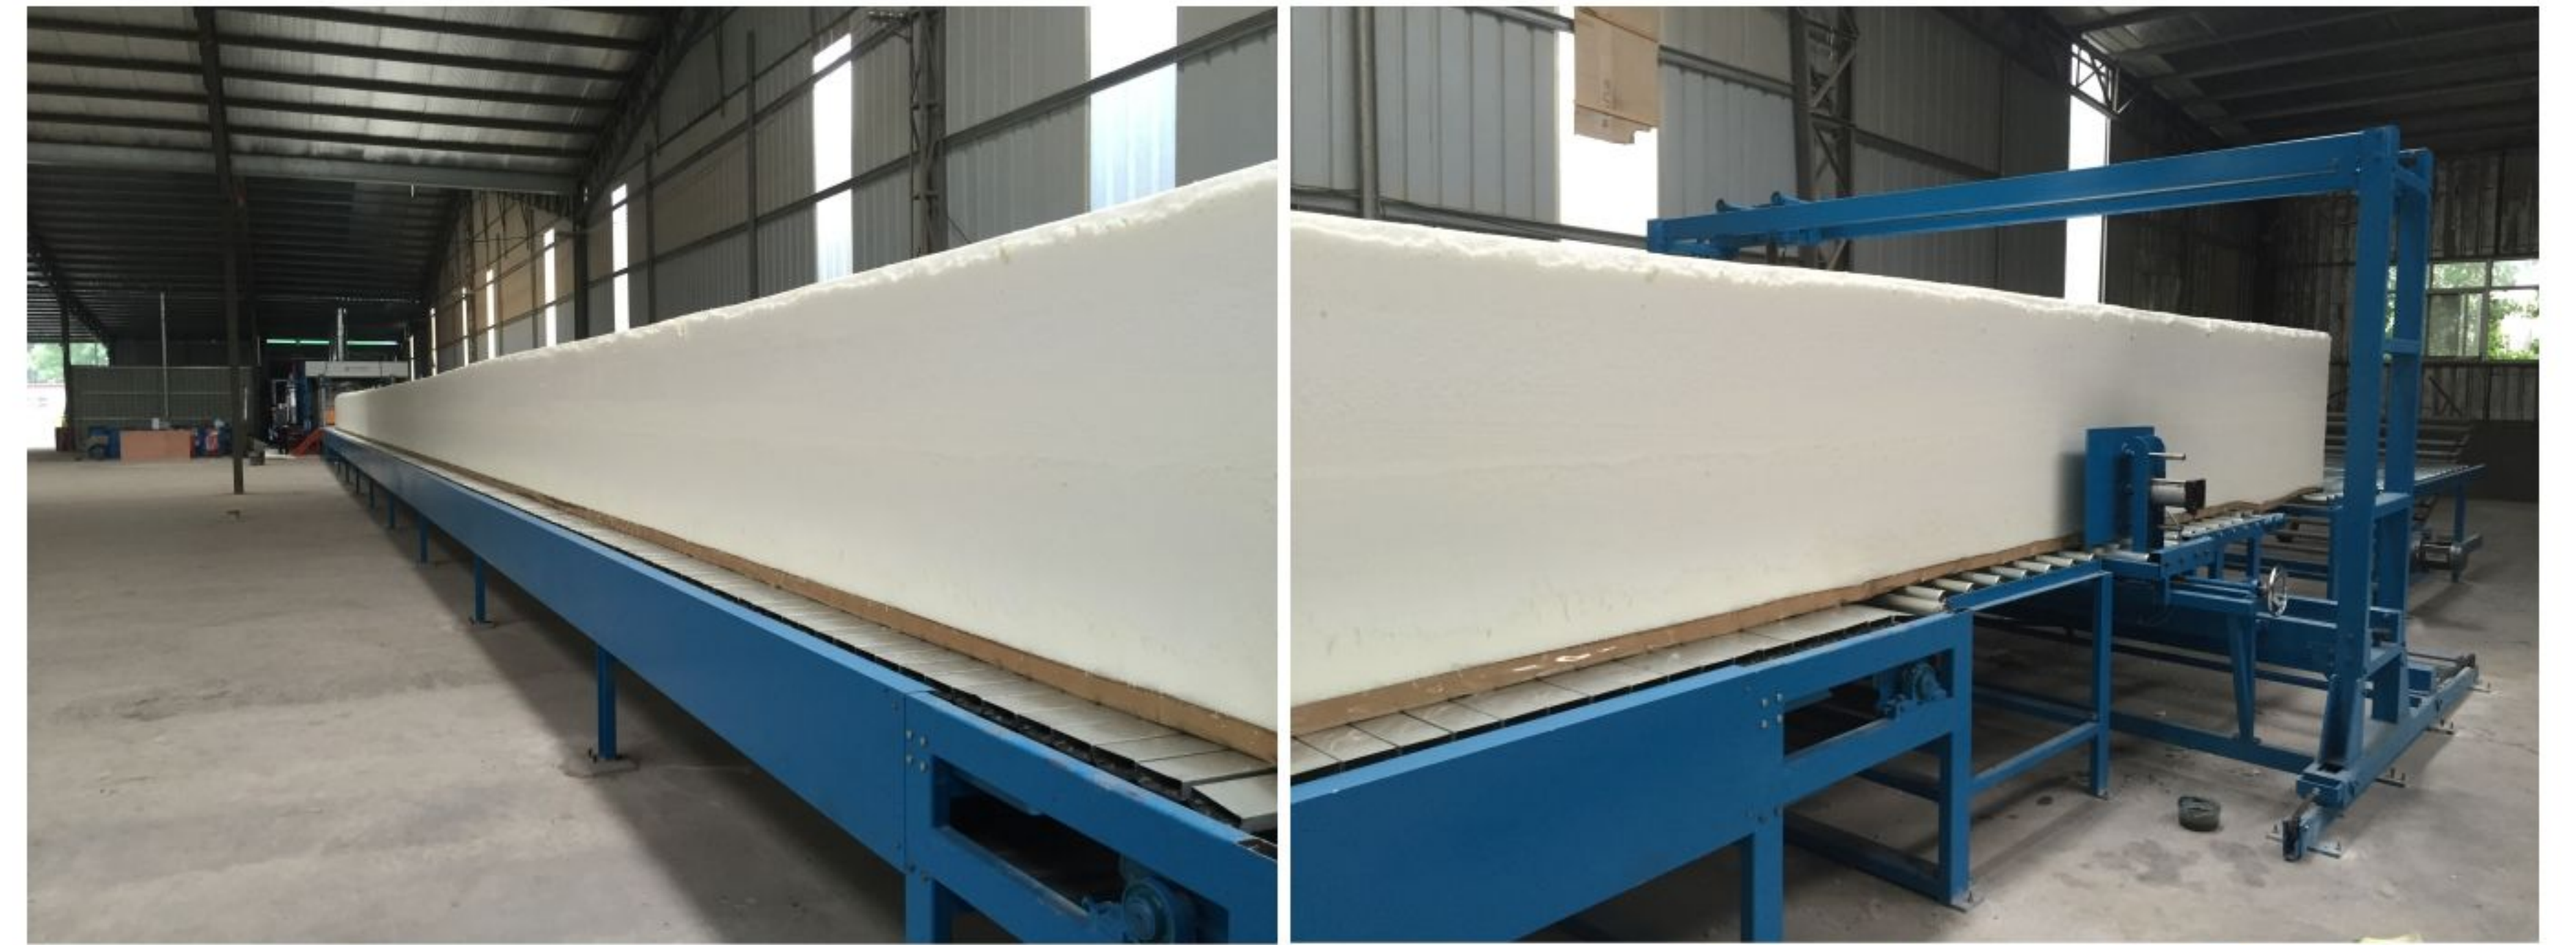

主要用途:  
Main Usage

本设备主要适用于8~70kg/m<sup>3</sup>密度范围的软质聚氨酯泡绵生产, 采用了自动化程度高、掌握更加灵活的人机界面控制系统, 用户可以储存200多种不同的配方, 也可以随时对配方进行调整或更改, 并可通过互联网进行远程控制, 使生产成本的控制更为科学、直观。可以生产出各种理想的家私绵、鞋材绵、胸围绵、电子绵, 以及适应于包装、制衣和汽车工业用的各种泡绵。(本机有: 自动手控和自动人机界面两种配置可供选择)——本设备不停机可更改配方, 不用测流量, 耐黄度可达到3~5级国际标准, 配合厂方要求提供各种配方, 代培训高级发泡师。

This equipment is used in soft PU products. Foaming Density Range: 8-70kg/CBM. The ideal Foam products are involved with Furniture, Shoes, Bra and Electricals field, also suitable for Mattresses, Sofa, Package, Cloths and Car industry. User can save over two hundred different of recipes. To adjust and change them by user at any time. User can remote control it by internet that reduce production cost scientific and directly. PLC Digital Touch Screen or Electric Control System. ----This machine can change the formulation no need stop machine, no need test flow, The degree of resistance to yellow can reach 3~5 international standard, cooperatethe customer's request to offer diffrend formulation, and training the foaming engineer.

主要技术参数:  
SPECIFICATION

最大喷量: Max. Output Capacity	200~350kg/分钟 (连续型) 200~350kg/min(Continuous Type)	侧墙板尺寸: Side Wall Size	L18m*H1220mm
混合头总功率: Mixer Total Power	37kw	跌落板: Fallplate	L7m*W1.3~2.3m(宽度可调) L7m*W1.3~2.3m(Adjustable)
最大搅拌速度: Max. Mixing Speed	2500~6000转/分钟	发泡平台: Foaming Platform	L2000mm*W3000mm*H700mm
发泡形式: Foaming Type	采用溢流槽和喷头两种方式 Trough & Sprayer	输送线: Conveyor Line	L18.1m
组份: Save Formular Q.T.Y.	13组份	侧纸/底纸输送+收卷系统 Side/Bottom Paper Feed & Rewind System	2套 2Sets.
发泡尺寸: Foaming Size	W2300mm*H1300mm(宽度可调) W2300mm*H1300mm(Width Adjustable)	走廊: Walkway	W500mm*H12m
控制系统: Control System	PLC数字触摸屏系统(台湾品牌)或电控柜系统 PLC Digital Touch Screen(Made In TaiWan) And Electric Control System	气阀: Air Valves	欧洲标准 Euro Standard
PPG罐: PPG Tank	5吨位*1套 5Ton*1Set	冷热水一体机: Chiller(Both Cooling & Heating System)	1套*15kw (20HP) (台湾品牌) 1Set*15kw (20HP) (Made In TaiWan)
POP罐: POP Tank	5吨位*1套 5Ton*1Set	边膜提升系统: Side Film Lifting System	1套 1Set
PPG+CACO3罐: PPG+CACO3 Tank	5吨位*1套 5Ton*1Set	发泡密度范围: Foaming Density Range	8~70公斤/立方 8~70kg/Cubicmeter
防火油罐: Fire-Retardant Tank	1吨位*1套 1Ton*1Set	裁断机: Match With Block Cutter	1台 1Set
TDI罐: TDI Tank	5吨位*1套 5Ton*1Set	机械总功率: Total Motor Power	大约125KW Approx. 125kw
MC罐: MC Tank	5吨位*1套 5Ton*1Set	空气压缩机: Air Compressor	配7.5KW(10HP)*1台 Match With 7.5KW(10HP)*1Set
硅油罐+水罐: Silicone +Water Tanks	150升*2套 150L*2Sets	机械净重: Machine N.W	约25吨 Approx. 25Ton
T-9罐+胺罐+色料罐(A.B.C): T-9+Amine+Color (A.B.C)	150升*5套 150L*5Sets	安装占地面积: Floor Space Required	L45m*W5m*H4.5m L45m*W5m*H4.5m



## ECMT-131A 全自动箱式泡绵发泡机 Fully-Auto Batch Foaming Machine



### 主要用途: Main Usage

本设备主要适用于8-50kg/m<sup>3</sup>密度范围的软质聚氨酯泡绵生产, 采用大料和小料全自动控制、灵活的人机界面控制系统, 用户可储存100种配方, 可以生产各种理想的家私绵、鞋材绵等各种泡绵。

This machine is use to produce 8-50kg/m<sup>3</sup> density soft foam , 8 groups chemicals are automatic controlled, use the touch screen control system, user can save 100 different of recipes . Its products used in bed,furniture and all kind sponge producing factories.

### 主要技术参数: SPECIFICATION

搅拌容量: Mixing Tank Capacity:	180升~250升 180L~250L	小料自动抽料泵: Auto Feeding Pumps For Amine, Silicone, T-9, H2O	4套(国产品牌) 4Sets (China Brand )
搅拌头总功率: Mixer Total Power:	11KW	冷水一体机: Chiller (Both Cooling & Heating System)	1台*10P(台湾品牌) 1Set*10P (Made In TaiWan)
搅拌速度: Mixing Speed:	0转~2800转/分钟 0~2800r/min	油压系统: Oil Hydraulic System	1套 1Set
可储存配方数量: Save Formular Q.T.Y.:	6组 6 Groups	电动压模装置: Electric Float Top System	1套(电动) 1Set (Electric)
控制系统: Control System:	PLC触摸屏控制系统 PLC Touch Screen Control System	空气过滤系统: Air Filtering System	1套 1Set
PPG罐: PPG Tank:	3吨*1套 3 Ton*1Set	水塔: Water Tower	1套 1Set
POP罐: POP Tank:	3吨*1套 3 Ton*1Set	水泵: Water Pump	1套 1Set
TDI罐: TDI Tank:	2吨*1套 2 Ton*1Set	发泡密度范围: Foaming Density Range	8~50kg/立方 8~50kg/Cubicmeter
MC罐: MC Tank:	1吨*1套 1 Ton*1Set	产量: Outputs	可生产泡绵96个/天/8小时 (480立方/天) 96 Blocks/Per day/8hrs (480m <sup>3</sup> /day)
硅油罐: Silicone Tank:	50L*1套 50L*1Set	配方模一套, 发泡尺寸: Match With One Square Mould, Foaming Size:	L2000mm*W2000mm*H1200mm(可按客户要求尺寸定做) L2000mm*W2000mm*H1200mm (To Be Requested)
胺罐: Amine Tank:	50L*1套 50L*1Set	配圆模一套, 发泡尺寸: Match With One Cylinder Mould, Foaming Size:	φ1800mm*H2200mm(可按客户要求尺寸定做) Dia1800mm*H2200mm (To Be Requested)
T-9罐: T-9 Tank:	50L*1套 50L*1Set	机器总功率: Total Motor Power	约30KW Approx 30KW
水罐: H2O Tank:	50L*1套 50L*1Set	机器总重量: Machine N.W.:	约6吨 A pprox 6Ton
气阀: Air Valves:	欧标气阀 Euro Standard	占地尺寸: Floor Space Required	L10m*W10m*H6m
大料自动上料和抽料泵: Auto Loading & Feeding Pumps For PPG, POP, TDL, MC	各4套(国产品牌) 4Sets (China Brand )		

## ECMT-131B 半自动箱式泡绵发泡机 Semi-Auto Batch Foaming Machine



### 主要用途: Main Usage

本设备主要适用于8-50kg/m<sup>3</sup>密度范围的软质聚氨酯泡绵生产, 采用了大料搅拌全自动控制、灵活的人机界面控制系统, 用户可以储存20种不同的发泡配方, 也可以随时对配方进行调整或更改, 可以生成出各种理想的家私绵、鞋材绵、胸围绵、电子绵, 以及适用于包装、制衣和汽车工业用的各种泡绵。(本机配置: 三个大原料罐和四个大原料罐可根据客户要求定做, 并有国产原料泵和美国VIKING泵两种配置可供选择)

Foam/Sponge producing machine with pneumatic motion, which can be used with Rectangular, Cubic and Cylindrical Molds. The speed of the Mixer can be controlled electronically from control panel. The small Raw-Materials are put in to the Tank manually. Its products used in Bed, Furniture and all kind Sponge Producing Factories.

### 主要技术参数: SPECIFICATION

搅拌容量: Mixing Tank Capacity:	180升~250升 180L ~ 250升	油压系统: Oil Hydraulic System:	1套 1Set
搅拌头总功率: Mixer Total Power:	11KW	电动压模装置: Electric Float Top System:	1套(电动) 1Set(Electric)
搅拌速度: Mixing Speed:	0r~2800r/min 0转~2800转/分钟	空气过滤系统: Air Filtering System:	1套 1Set.1
可储存配方数量: Save Formular Q.T.Y.:	6组 6 Groups.	水塔: Water Tower:	1套 1Set.
控制系统: Control System:	PLC触摸屏控制系统 PLC Touch Screen Control System	水泵: Water Pump:	1套 1Set.
PPG罐: PPG Tank:	3吨*1套 3Ton*1Set.	发泡密度范围: Foaming Density Range:	8~50kg/立方. 8~50kg/Cubicmeter.
POP罐: POP Tank:	3吨*1套 3Ton*1Set.	产量: Outputs:	可生产泡绵48个/天/8小时(230立方/天) 48 Blocks/per day/8hrs(230m <sup>3</sup> /day)
TDI罐: TDI Tank:	2吨*1套 2Ton*1Set.	配方模一套, 发泡尺寸: Match With One Square Mould, Foaming Size:	L2000mm*W2000mm*H1200mm(可按客户要求尺寸定做) L2000mm*W2000mm*H1200mm(To Be Requested)
MC罐: MC Tank:	1吨*1套 1Ton*1Set.	配圆模一套, 发泡尺寸: Match With One Cylinder Mould, Foaming Size:	φ1800mm*H2200mm(可按客户要求尺寸定做) Dia1800mm*H2200mm(To Be Requested)
气阀: Air Valves:	欧标气阀 Euro Standard	机器总功率: Total Motor Power:	约25KW. Approx 25KW.
大料自动上料/抽料泵: Auto Loading & Feeding Pumps For PPG, POP, TDL, MC:	4套(国产品牌) 4Sets (China Brand )	机器总重量: Machine N.W.:	约6吨
冷水一体机: Chiller(Both Cooling & Heating System):	1台*10P(台湾品牌) 1Set*10P(Made In TaiWan)	占地尺寸: Floor Space Required:	L10m*W10m*H6m.



## ECMT-101 手动泡绵发泡机(卧式) Manual Foam Mixing Machine(Seated Type)

### 主要用途: Main Usage

本机主要用于泡绵原料的混合搅拌发泡工作,采用高速与低速双段独立调速控制,高速段配有定时自动控制功能和自动电子刹车装置。

The ECMT-101 uses the hand pouring process. The mixing propeller is fixed at the bottom of mixing tank, less air comes into the chemical stream during the mixing which involves simple operation and high working efficiency.

### 主要技术参数: SPECIFICATION

搅拌容积: Mixing Capacity:	150kg
搅拌头功率: Mixing speed:	0 ~ 2800r/min(Adjustable) 0 ~ 2800转/分钟(速度可调)
总功率: Total Motor Power:	11kw
两个搅拌桶: Match With Two Mixing Barrels	φ 450mm*H750mm, φ 500mm*H750
机器净重: Machine N.W.	600kg.
占地尺寸: Floor Space	L1250mm*W650mm*H1100mm



## ECMT-102 手动泡绵发泡机(立式) Manual Foam Mixing Machine(Vertical Type)

### 主要技术参数: SPECIFICATION

搅拌容积: Mixing Capacity:	150kg
搅拌速度: Mixing speed:	0 ~ 2800转/分钟(速度可调) 0 ~ 2800r/min(Adjustable)
总功率: Total Motor Power:	11kw
两个搅拌桶: Match With Two Mixing Barrels	φ 450mm*H670mm, φ 500mm*H670
机器净重: Machine N.W.:	850kg.
占地尺寸: Floor Space:	L1400mm*W940mm*H3050mm



## ECMT-139 手动小型泡绵立切机 Small Vertical Foam Cutting Machine

### 主要用途: Main Usage

本机主要用于小块泡绵体的裁切片工作。同时也可以裁切PU, PE, PVC 等其它软质材料。  
 This Machine is special used for Small Foam Blocks Cutting.It is also can cut PU,PE,PVC etc.. And Other Soft Materials.

### 主要技术参数: SPECIFICATION

内工作台尺寸: Inner Table Size:	W400mm*L1000mm
外工作台尺寸: Outer Table Size:	W1000mm*L1000mm
有效切割泡绵高度: Cutting Foam Height:	H600mm
切割厚度: Cutting Thickness:	2mm 以上 2mm Up
刀带尺寸: Blade Length:	L4850mm*W30mm*T0.45mm
刀带自动张紧装置: Blade Tension System:	可选加装 Choose Available
机器净重: Machine N.W.:	800kg
总功率: Total Motor Power:	1.34kw
占地尺寸: Floor Space:	L1600mm*W1600mm*H2150mm



## ECMT-109 110 手动泡绵立切机 Manual Vertical Foam Cutting Machine

### 主要用途: Main Usage

本机主要用于大小泡绵体的裁切片工作,同时也可以裁切PU, PE, PVC等其它软质材料。

This Machine is used for Foam Blocks Cutting.It is also can cut PU,PE,PVC etc.. And Other Soft Materials.

### 主要技术参数: SPECIFICATION

ECMT-109		ECMT-110	
内工作台尺寸: Inner Table Size:	W1320mm*L2290mm	内工作台尺寸: Inner Table Size:	W1720mm*L2290mm
外工作台尺寸: Outer Table Size:	W1200mm*L2290mm	外工作台尺寸: Outer Table Size:	W2000mm*L2290mm
有效切割泡绵高度: Cutting Foam Height:	H1200mm	有效切割泡绵高度: Cutting Foam Height:	H1200mm
切割厚度: Cutting Thickness:	2mm以上 2mm Up	切割厚度: Cutting Thickness:	2mm以上 2mm Up
刀带尺寸: Blade Length:	L7700mm*W30mm*T0.45mm	刀带尺寸: Blade Length:	L8500mm*W30mm*T0.45mm
刀带自动张紧装置: Blade Tension System:	可选加装 Choose Available	刀带自动张紧装置: Blade Tension System:	可选加装 Choose Available
机器净重: Machine N.W.	1150kg	机器净重: Machine N.W.	1250kg
总功率: Total Motor Power	1.34kw	总功率: Total Motor Power	1.34kw
占地尺寸: Floor Space	L3500mm*W4500mm*H2400mm	占地尺寸: Floor Space	L4500mm*W5200mm*H2400mm



## ECMT-128 128B 半自动泡绵立切机 Semi-Auto Vertical Foam Cutting Machine

### 主要用途: Main Usage

本机采用数字设定切绵厚度,护刀杆电动控制升降,内工作挡板电动控制。

This Machine is used for Foam Blocks Cutting.Both Knife Guide & Baffle Adopts Electric Control .

### 主要技术参数: SPECIFICATION

ECMT-128		ECMT-128B	
内工作台尺寸: Inner Table Size:	W1320mm*L2290mm	内工作台尺寸: Inner Table Size:	W1720mm*L2290mm
外工作台尺寸: Outer Table Size:	W1200mm*L2290mm	外工作台尺寸: Outer Table Size:	W2000mm*L2290mm
有效切割泡绵高度: Cutting Foam Height:	2mm Up 2mm 以上	有效切割泡绵高度: Cutting Foam Height:	2mm Up 2mm 以上
切割厚度: Cutting Thickness:	H1200mm	切割厚度: Cutting Thickness:	H1200mm
刀带尺寸: Blade Length:	L7700mm*W30mm*T0.45 mm	刀带尺寸: Blade Length:	L8500mm*W30mm*T0.45 mm
刀带自动张紧装置: Blade Tension System:	可选加装 Choose Available	刀带自动张紧装置: Blade Tension System:	可选加装 Choose Available
机器净重: Machine N.W.:	1250kg	机器净重: Machine N.W.:	1350kg
总功率: Total Motor Power:	1.45kw	总功率: Total Motor Power:	1.45kw
占地尺寸: Floor Space:	L3500mm*W4500mm*H2400mm	占地尺寸: Floor Space:	L4500mm*W5200mm*H2400mm





## ECMT-111 全自动泡绵立切机 Fully-Auto Vertical Foam Cutting Machine

### 主要用途: Main Usage

本机全自动PLC程序控制, 主要用于方形泡绵体切割工作。

This Machine is Fully Automatic Type, Adopts PLC Programmed for foam Sheets cutting.

### 主要技术参数: SPECIFICATION

内工作台尺寸: Inner Table Size	W2150mm*L2440mm
外工作台尺寸: Outer Table Size	W2150mm*L2440mm
有效切割泡绵尺寸: Cutting Foam Size	L2100mm*W2100mm*H1200mm
有效切割高度: Cutting Foam Height	H1200mm
切割厚度范围: Cutting Thickness	3mm Up
刀带尺寸: Blade Length	L9930mm*W15mm*T0.45mm
挡板行程: Baffle Travel Distance	W2050mm
内外挡板高度: Inner/Outer Baffle Height	H1000mm
刀架行走速度: Cutter Frame Moving Speed	0~30米/分钟 0~30m/min
刀带自动张紧装置: Blade Tension System	可选加装 Choose Available
机器净重: Machine N.W	2200kg
总功率: Total Motor Power	7.2kw
占地尺寸: Floor Space	L3700mm*W5700mm*H2900mm



## ECMT-115 115B 全自动路轨式泡绵平切机 Automatic Foam Long Sheets Cutter

### 主要用途: Main Usage

本机主要用于无限长泡绵的连续切片工作, 本机可加装自动卷料装置使操作更方便。

This Machine used for Foam Long Sheets Cut.

### 主要技术参数: SPECIFICATION

ECMT-115		ECMT-115B	
有效切割泡绵宽度: Cutting Foam Width	W1650mm	有效切割泡绵宽度: Cutting Foam Width	W2150mm
有效切割泡绵高度: Cutting Foam Height	H1200mm	有效切割泡绵高度: Cutting Foam Height	H1200mm
切割厚度: Cutting Thickness	2mm以上 2mm Up	切割厚度: Cutting Thickness	2mm以上 2mm Up
切割速度: Cutting Speed	0~60米/分钟 (速度可调) 0~60m/min(Adjustable)	切割速度: Cutting Speed	0~60米/分钟 (速度可调) 0~60m/min(Adjustable)
刀带尺寸: Blade Length	L6840mm*W30mm*T0.45mm	刀带尺寸: Blade Length	L8300mm*W30mm*T0.45mm
切割方式: Cutting Type	全自动+PLC控制+压辊 Full automatic+PLC control+Press Roller	切割方式: Cutting Type	全自动+PLC控制+压辊 Full automatic+PLC control+Press Roller
刀带自动张紧装置: Blade Tension System	可选加装 Choose Available	刀带自动张紧装置: Blade Tension System	可选加装 Choose Available
机器净重: Machine N.W	1600kg	机器净重: Machine N.W	1800kg
总功率: Total Motor Power	6.99kw	总功率: Total Motor Power	6.99kw
占地尺寸: Floor Space	W2600mm*H2400mm	占地尺寸: Floor Space	W2800mm*H2400mm



## ECMT-104 105 全自动泡绵平切机 Automatic Horizontal Foam Cutting Machine

### 主要用途: Main Usage

本机主要用于单个方形泡绵体的连续切片工作, 加装压辊更适合于床垫泡绵块的大厚度规格切割。

The Automatic Horizontal Cutting Machine ECMT-104/105 is a Fully Automatic machine for cutting and stacking of flexible foam and open-celled P.V.C. foam. The cut off foam slice is no need of being taken away from working table after each cutting. Depending upon cutting thickness and foam density, This machine matched with Press-Roller which is good for High Thickness Sheets Cutting for Foam Mattress use, the cutting angle of the knife guidance can be adjusted from 0° to 5°.

### 主要技术参数: SPECIFICATION

ECMT-104		ECMT-105	
有效切割泡绵尺寸: Cutting Foam Size	W1650mm*L2000mm	有效切割泡绵尺寸: Cutting Foam Size	W2150mm*L3000mm
有效切割泡绵高度: Cutting Foam Height	H1200mm	有效切割泡绵高度: Cutting Foam Height	H1200mm
切割厚度: Cutting Thickness	2mm 以上 2mm Up	切割厚度: Cutting Thickness	2mm 以上 2mm Up
切割速度: Cutting Speed	0 - 50m/分钟(可调) 0 - 50m/min(Adjustable)	切割速度: Cutting Speed	0 - 50m/分钟(可调) 0 - 50m/min(Adjustable)
刀带长度: Blade Length	L9060mm*W30mm*T0.45mm	刀带长度: Blade Length	L10060mm*W30mm*T0.45mm
切割方式: Cutting Type	全自动触摸屏+PLC控制+压辊 Full automatic touch screen+PLC control+With Press-Roller	切割方式: Cutting Type	全自动触摸屏+PLC控制+压辊 Full automatic touch screen+PLC control+With Press-Roller
刀带自动张紧装置: Blade Tension System	可选加装 Choose Available	刀带自动张紧装置: Blade Tension System	可选加装 Choose Available
机器净重: Machine N.W	2100kg	机器净重: Machine N.W	2300kg
电机总功率: Total Motor Power	8.12kw	电机总功率: Total Motor Power	8.12kw
占地尺寸: Floor Space	L5800mm*W3600mm*H2400mm	占地尺寸: Floor Space	L7800mm*W4500mm*H2400mm



## ECMT-104B 105B 全自动吸风泡绵平切机 Automatic Horizontal Foam Cutting Machine (With Vacuum System)

### 主要用途: Main Usage

本机主要用于单个方形泡绵体的连续切片工作, 加装压辊以及吸风装置更适合于床垫泡绵块的大厚度规格切割。

The Automatic Horizontal Cutting Machine ECMT-104/105 is a Fully Automatic machine for cutting and stacking of flexible foam and open-celled P.V.C. foam. The cut off foam slice is no need of being taken away from working table after each cutting. Depending upon cutting thickness and foam density, This machine matched with Press-Roller And Vacuum System which is good for High Thickness Sheets Cutting for Foam Mattress use, the cutting angle of the knife guidance can be adjusted from 0° to 5°.

### 主要技术参数: SPECIFICATION

ECMT-104B		ECMT-105B	
有效切割泡绵尺寸: Cutting Foam Size	W1650mm*L2000mm	有效切割泡绵尺寸: Cutting Foam Size	W2150mm*L3000mm
有效切割泡绵高度: Cutting Foam Height	H1200mm	有效切割泡绵高度: Cutting Foam Height	H1200mm
切割厚度: Cutting Thickness	2mm 以上 2mm Up	切割厚度: Cutting Thickness	2mm 以上 2mm Up
切割速度: Cutting Speed	0 - 50m/分钟(可调) 0 - 50m/min(Adjustable)	切割速度: Cutting Speed	0 - 50m/分钟(可调) 0 - 50m/min(Adjustable)
刀带长度: Blade Length	L9060mm*W30mm*T0.45mm	刀带长度: Blade Length	L10060mm*W30mm*T0.45mm
切割方式: Cutting Type	全自动触摸屏+PLC控制+压辊+加吸风 Full automatic touch screen+PLC control+With Press-Roller+With Vacuum System	切割方式: Cutting Type	全自动触摸屏+PLC控制+压辊+加吸风 Full automatic touch screen+PLC control+With Press-Roller+With Vacuum System
刀带自动张紧装置: Blade Tension System	可选加装 Choose Available	刀带自动张紧装置: Blade Tension System	可选加装 Choose Available
机器净重: Machine N.W	2300kg	机器净重: Machine N.W	2500kg
电机总功率: Total Motor Power	15.32kw	电机总功率: Total Motor Power	15.32kw
占地尺寸: Floor Space	L5800mm*W3600mm*H2400mm	占地尺寸: Floor Space	L7800mm*W4500mm*H2400mm





## ECMT-104C 全自动医疗/化妆绵平切机(强力吸风装置) Automatic Medical/Makeup Foam Cutting Machine(With Vacuum System)

主要用途:  
Main Usage

本机主要用于医疗绵/化妆绵的切片工作。  
This Machine Is Special Used For Medical/Makeup Foam Blocks Cutting.

主要技术参数:  
SPECIFICATION

ECMT-104C	
有效切割泡绵尺寸: Cutting Foam Size:	W1000mm*L1000mm
有效切割泡绵高度: Cutting Foam Height:	H500mm
切割厚度: Cutting Thickness:	2mm-30mm 2mm-30mm
切割速度: Cutting Speed:	0~50m/分钟(可调) 0~50m/min(Adjustable)
切割方式: Cutting Type:	全自动触摸屏+PLC控制+吸风 Full automatic touch screen+PLC control+Vacuum System
工作台材质: Table Material:	10mm防腐尼龙板 10mm Acroziling Nylon Plate
刀带自动张紧装置: Blade Tension System:	可选加装 Choose Available
机器净重: Machine N.W.:	1200kg
电机总功率: Total Motor Power:	8.24kw
占地尺寸: Floor Space:	L1900mm*W3000mm*H2000mm



## ECMT-107 108 108B 全自动圆盘泡绵平切机 Automatic Circular Foam Cutting Machine

主要用途:  
Main Usage

本机主要用于多个泡绵体的低厚度连续切片工作。可选加装强力吸风装置,使切割精度更高,运行更平稳。

This Machine eliminated the reciprocating action and reverse movement of horizontal cutting machine. The cutting thickness can be pre-set from the Control Box in steps of 1/100mm, The Cutting Angle of the Knife Guidance can be adjusted in the range 0o - 5o by means of a Hand Wheel. A D.C. motor with smooth start and soft braking drives the table. The Turning Speed of the table is infinitely adjustable. As customers require, we also can design with a Vacuum System available in the cutting area, prevents the movement of blocks during cutting. Full automatic touch screen +PLC control + press roll.

主要技术参数:  
SPECIFICATION

ECMT-107(φ 6000)	ECMT-108(φ 7300)	ECMT-108B(φ 10500)			
有效切割泡绵尺寸: Cutting Foam Size:	W1500mm*L2000mm (4pcs)	有效切割泡绵尺寸: Cutting Foam Size:	W1500mm*L2000mm(6pcs) W2150mm*L3000mm(3pcs)	有效切割泡绵尺寸: Cutting Foam Size:	W1500mm*L2000mm(8pcs) W2150mm*L4500mm(3pcs)
有效切割泡绵高度: Cutting Foam Height:	H1200mm	有效切割泡绵高度: Cutting Foam Height:	H1200mm	有效切割泡绵高度: Cutting Foam Height:	H1200mm
切割厚度: Cutting Thickness:	2mm以上 2mm Up	切割厚度: Cutting Thickness:	2mm以上 2mm Up	切割厚度: Cutting Thickness:	2mm以上 2mm Up
切割速度: Cutting Speed:	0~3.5圈/分钟(速度可调) 0~3.5rpm(Adjustable)	切割速度: Cutting Speed:	0~3.5圈/分钟(速度可调) 0~3.5rpm(Adjustable)	切割速度: Cutting Speed:	0~3.5圈/分钟(速度可调) 0~3.5rpm(Adjustable)
刀带尺寸: Blade Length:	L9540mm*W30mm*TO.45mm	刀带尺寸: Blade Length:	L10580mm*W30mm*TO.45mm	刀带尺寸: Blade Length:	L10870mm*W30mm*TO.45mm
切割方式: Cutting Type:	全自动触摸屏+PLC控制 Full automatic touch screen+PLC control	切割方式: Cutting Type:	全自动触摸屏+PLC控制 Full automatic touch screen+PLC control	切割方式: Cutting Type:	全自动触摸屏+PLC控制 Full automatic touch screen+PLC control
强力吸风装置: Vacuum System:	可选加装 Choose Available	强力吸风装置: Vacuum System:	可选加装 Choose Available	强力吸风装置: Vacuum System:	可选加装 Choose Available
刀带自动张紧装置: Blade Tension System:	可选加装 Choose Available	刀带自动张紧装置: Blade Tension System:	可选加装 Choose Available	刀带自动张紧装置: Blade Tension System:	可选加装 Choose Available
工作台尺寸: Work Table Size:	φ 6000mm Dia6000mm	工作台尺寸: Work Table Size:	φ 7300mm Dia7300mm	工作台尺寸: Work Table Size:	φ 10500mm Dia10500mm
机器净重: Machine N.W.	3300kg	机器净重: Machine N.W.	3500kg	机器净重: Machine N.W.	4500kg
总功率: Total Motor Power:	8.92kw	总功率: Total Motor Power:	8.92kw	总功率: Total Motor Power:	11.92kw
占地尺寸: Floor Space:	L7500mm*W6000mm*H2400mm	占地尺寸: Floor Space:	L7500mm*W6000mm*H2400mm	占地尺寸: Floor Space:	L11.5m*W11m*H2400mm



## ECMT-135 136 全自动泡绵平切机(输送网带+强力吸风装置) Automatic Horizontal Foam Cutting Machine(Conveyor Belt + Vacuum System)

主要用途:  
Main Usage

本机主要采用输送网带和强力吸风装置使切割更平稳,精度更高。

This Machine Adopts Conveyor Belt And Heavy Duty Vacuum System Which is For Foam Block Sheets High Precision Cutting. It Can Make Each Cutting More Smoothly.High Precision Cutting, Low Noise And Running More Stable.

主要技术参数:  
SPECIFICATION

ECMT-135		ECMT-136	
有效切割泡绵尺寸: Cutting Foam Size:	W1650mm*L2000mm	有效切割泡绵尺寸: Cutting Foam Size:	W2150mm*L3000mm
有效切割泡绵高度: Cutting Foam Height:	H1200mm	有效切割泡绵高度: Cutting Foam Height:	H1200mm 2mm以上
切割厚度: Cutting Thickness:	2mm以上 2mm Up	切割厚度: Cutting Thickness:	2mm Up
切割速度: Cutting Speed:	0~30m/分钟(速度可调) 0~30m/min(Adjustable)	切割速度: Cutting Speed:	0~30m/分钟(速度可调) 0~30m/min(Adjustable)
刀带尺寸: Blade Length:	L9060mm*W30mm*TO.45	刀带尺寸: Blade Length:	L10060mm*W30mm*TO.45
切割方式: Cutting Type:	全自动触摸屏+PLC控制+压辊+输送网带 Full automatic touch screen+PLC control+Press Roller+Conveyor Belt	切割方式: Cutting Type:	全自动触摸屏+PLC控制+压辊+输送网带 Full automatic touch screen+PLC control+Press Roller+Conveyor Belt
强力吸风装置: Vacuum System:	已配装 Available	强力吸风装置: Vacuum System:	已配装 Available
刀带自动张紧装置: Blade Tension System:	可选加装 Choose Available	刀带自动张紧装置: Blade Tension System:	可选加装 Choose Available
机器净重: Machine N.W.:	2800kg	机器净重: Machine N.W.:	3100kg
总功率: Total Motor Power:	11.72kw	总功率: Total Motor Power:	11.72kw
占地尺寸: Floor Space:	L5000mm*W4000mm*H2400mm	占地尺寸: Floor Space:	L7000mm*W4500mm*H2400mm



## ECMT-137 137B 全自动再生绵平切机 Automatic Rebonded Foam Cutting Machine

主要用途:  
Main Usage

本机主要用于再生泡绵的切片工作。

This Machine is special used for Rebonded Foam Blocks Cutting.

主要技术参数:  
SPECIFICATION

ECMT-137		ECMT-137B	
有效切割泡绵尺寸: Cutting Foam Size:	W1650mm*L2000mm	有效切割泡绵尺寸: Cutting Foam Size:	W2150mm*L3000mm
有效切割泡绵高度: Cutting Foam Height:	H1200mm	有效切割泡绵高度: Cutting Foam Height:	H1200mm
切割厚度: Cutting Thickness:	3mm以上 3mm Up	切割厚度: Cutting Thickness:	3mm以上 3mm Up
切割速度: Cutting Speed:	0~25m/分钟(速度可调) 0~25m/min(Adjustable)	切割速度: Cutting Speed:	0~25m/分钟(速度可调) 0~25m/min(Adjustable)
刀带尺寸: Blade Length:	L7960mm*W50mm*TO.56mm	刀带尺寸: Blade Length:	L8900mm*W50mm*TO.56mm
切割方式: Cutting Type:	全自动触摸屏+PLC控制+压辊 Full automatic touch screen+PLC control+Press Roller	切割方式: Cutting Type:	全自动触摸屏+PLC控制+压辊 Full automatic touch screen+PLC control+Press Roller
刀带自动张紧装置: Blade Tension System:	可选加装 Choose Available	刀带自动张紧装置: Blade Tension System:	可选加装 Choose Available
机器净重: Machine N.W.:	2100kg	机器净重: Machine N.W.:	2300kg
总功率: Total Motor Power:	8.92kw	总功率: Total Motor Power:	8.92kw
占地尺寸: Floor Space:	L5800mm*W3700mm*H2400mm	占地尺寸: Floor Space:	L7800mm*W4500mm*H2400mm





## ECMT-138 全自动硬质泡沫平切机

### Automatic Phenolic/Rigid Foam Cutting Machine

#### 主要用途:

Main Usage  
 本机主要用于酚醛泡沫硬质泡沫板的切片工作。  
 This Machine is special used for Phenolic Foam & Rigid Foam Blocks Cutting.

#### 主要技术参数:

有效切割泡沫尺寸: Cutting Foam Size:	W1650mm*L3000mm*H1200mm
有效切割泡沫高度: Cutting Foam Height:	1200mm
切割厚度: Cutting Thickness:	2mm-25mm
切割速度: Cutting Speed:	0-12m
刀带尺寸: Blade Length:	L8500mm*W50mm*T0.56mm
切割方式: Cutting Type:	全自动触摸屏+PLC控制+压辊+吸风装置 Full automatic touch screen+PLC control+Press Roller+ Vacuum System
机器净重: Machine N.W:	2800kg
总功率: Total Motor Power:	21kw
占地尺寸: Floor Space:	L7800mm*W4500mm*H2400mm



## ECMT-146 全自动泡沫多刀平切机

### Automatic Horizontal Foam Cutting Machine (Multicutter Type)



#### 主要用途:

Main Usage  
 全自动泡沫多刀平切机，主要是配套连续发泡生产线使用，用于海绵床垫的大规模生产，高效，节省人力，是不久的将来海绵生产自动化不可缺少的设备。

Automatic Horizontal Foam Cutting Machine (Multitool Type), is use with continuous foaming machine, use to foam mattress big production, high efficiency, less manpower, it's the necessary machine to produce foam in the future.

#### 主要技术参数:

有效切割泡沫尺寸: Cutting Foam Size	W2100mm*L2100mm*H800mm
切割厚度: Cutting Thickness	50mm-180mm
切割速度: Cutting Speed	2米/分钟 2m/min
一次性切割片数: Cutting Pcs One Time	15片/次 15Pcs/One Time
切割方式: Cutting Type	全自动触摸屏+PLC控制&锯齿刀割 Full automatic touch screen + PLC control + Tooth Knife Cut
升降方式: Up And Down Type	采用直线传动, 步进电机驱动 Use Linear Motion, Step Motor Driver
机器净重: Machine N.W.	800kg
电机总功率: Total Motor Power	25kw
占地尺寸: Floor Space	L3000mm*400mm*H2500mm

## ECMT-116 全自动泡沫裁断机(锯齿)

### Automatic Foam Block Cutter (Cross Type)



#### 主要用途:


Main Usage  
 本机采用双锯齿刀设计主要用于连续发泡后断泡的裁断切割工作。  
 This machine is equipped with Continuous Foaming Machine Which used for customer nominated Foam Block's Length cutoff, its use double tooth knife type.

#### 主要技术参数:

有效切割泡沫尺寸: Cutting Foam Size:	W2400mm
有效切割泡沫高度: Cutting Foam Height:	H1300mm
切割速度: Cutting Speed:	0-20米/分钟 0-20m/min
切割方式: Cutting Type:	全自动控制 Full automatic control
锯齿刀尺寸: Tooth Knife Length:	L1760mm*W100mm*T1mm
机器净重: Machine N.W:	1800kg
机器总功率: Total Motor Power:	3.7kw
占地尺寸: Floor Space:	L6000mm*W4400mm*H4000mm

## ECMT-114 114B 全自动泡沫压形机

### Automatic Profiles Foam Cutting Machine

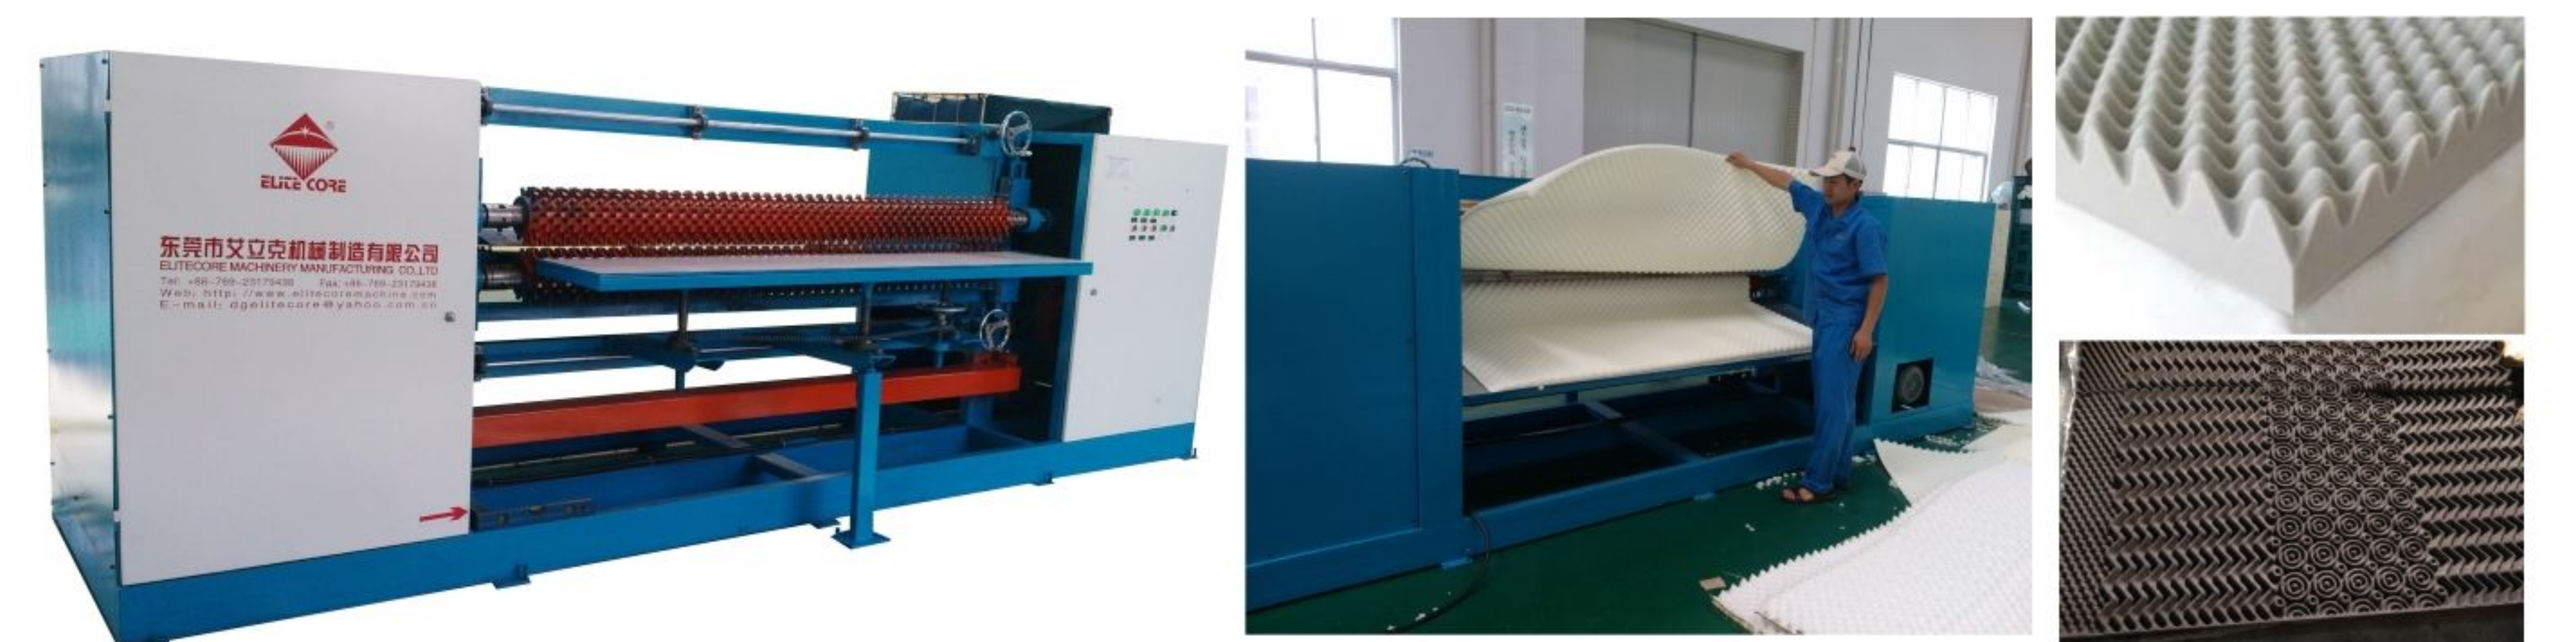

#### 主要用途:

Main Usage  
 本机主要用于不同形状凹凸泡绵的成型切割工作。  
 This machine Special used for Foam concavo-convex shape making and cutting.

#### 主要技术参数:

ECMT-114		ECMT-114B	
有效加工泡沫宽度: Profiling Foam Size	W1650mm	有效加工泡沫宽度: Profiling Foam Size	W2150mm
切割深度: Profiling Depth	D30mm	切割深度: Profiling Depth	D30mm
切割速度: Cutting Speed	0-30米/分钟 (可调) 0-30m/min (Adjustable)	切割速度: Cutting Speed	0-30米/分钟 (可调) 0-30m/min (Adjustable)
压形辊速度: Profile Roller Speed	0-30圈/分钟 (可调) 0-30r/min (Adjustable)	压形辊速度: Profile Roller Speed	0-30圈/分钟 (可调) 0-30r/min (Adjustable)
刀带长度: Blade Length	L8190mm*W50mm*T0.56mm	刀带长度: Blade Length	L9190mm*W50mm*T0.56mm
机器净重: Machine N.W.	2100kg	机器净重: Machine N.W.	2300kg
电机总功率: Total Motor Power	9.94kw	电机总功率: Total Motor Power	9.94kw
占地尺寸: Floor Space	L4300mm*W1250mm*H1500mm	占地尺寸: Floor Space	L4500mm*W1300mm*H1500mm



## ECMT-112A 数控异型切割机(线刀) CNC Contour Cutting Machine(Wire Type)



### 主要用途: Main Usage

本机采用全电脑数控, 线刀切割加装强力吸尘装置, 用于泡绵, 泡沫体, PU, PE, PVC等软/硬质材料的两维/三维图形的切割工作。  
This Machine Computerized, Adopts Wire Cutting Type & Matched With Powerful Dust Clean System, This Machine special used for 2D/3D Contour Shapes Cutting For Soft /Hard Materials Such As Foam Blocks, Phenolic Foam/Rigid Foam Blocks, PU, PE, PVC etc.

### 主要技术参数: SPECIFICATION

有效切割泡绵尺寸: Cutting Foam Size	W2000mm*L2000mm	压板装置: Press Plate Device	壹套 One Set
有效切割泡绵高度: Cutting Foam Height	H1200mm	线刀尺寸: Blade Length	L8790mm*Dia1.3mm
切割泡绵密度: Cutting Foam Density	≤200kg/立方(误差±0.3~0.5mm) ≤200kg/CBM(+0.3-0.5mm)	控制方式: Control Type	全自动电脑控制 Computerized
切割速度: Cutting Speed	0~10米/分钟 0~10m/min	机器净重: Machine N.W	2200kg
工作台移动速度: Table Moving Speed	0~10米/分钟 0~10m/min	电机总功率: Total Motor Power	6.22kw
工作台运行方式: Table Moving Type	90°旋转或者来回行走方式(可选) 90° Rotatory Or Go And Back (To Be Requested)	占地尺寸: Floor Space	L5200mm*W4500mm*H2400mm
除尘装置: Dust Clean System	壹套*2.2kw One Set*2.2kw		

## ECMT-112B 立式数控异型切割机(环刀) CNC Contour Cutting Machine(Vertical Knife Type)



### 主要用途: Main Usage

本机采用全电脑数控, 立式环刀用于泡绵、泡沫体, PU、PE、PVC等软质片材的竖向切割工作。  
This Machine Computerized, Adopts Vertical Blade Type, This Machine Special Used For Vertical Sheets Cutting For Soft Materials Such As Foam Blocks, PU, PE, PVC etc.

### 主要技术参数: SPECIFICATION

有效切割泡绵尺寸: Cutting Foam Size	W2200mm*L3000mm
有效切割泡绵高度: Cutting Foam Height	H1000mm
自动升降上料台: Auto Block Lifting Table	L2000mm*W2000mm
切割泡绵密度: Cutting Foam Density	≤80kg/CBM(±0.3~0.5mm) ≤80kg/CBM(+0.3-0.5mm)
切割速度: Cutting Speed	0~10米/分钟 0~10m/min
工作台移动速度: Table Moving Speed	0~10米/分钟 0~10m/min
单刀竖向运行方式: Single Blade Vertical Moving Type	采用网带来回行走方式 Adopt Belt Moving Type
控制方式: Control Type	全自动电脑控制+伺服系统 Computerized + Servo System
切割方式: Cutting Type	立式环刀 Vertical Blade Type
机器净重: Machine N.W	4500kg
机器总功率: Total Motor Power	13kw
占地尺寸: Floor Space	L6000mm*W4000mm*H3000mm



## ECMT-112C 数控异型切割机(环形刀片) CNC Contour Cutting Machine(Knife Type)



### 主要用途: Main Usage



本机采用全电脑数控，环形刀片切割，用于泡绵、泡沫体，PU、PE、PVC等软质材料的两维/三维图形的切割工作。

This Machine Computerized, Adopts Knife Cutting Type & Matched With Press Plate Device, This Machine special used for 2D/3D Contour Shapes Cutting For Soft Materials Such As Foam Blocks, PU, PE, PVC etc.

### 主要技术参数: SPECIFICATION

有效切割泡绵尺寸: Cutting Foam Size	W2000mm*L2000mm	压板装置: Press Plate Device	壹套 One Set
有效切割泡绵高度: Cutting Foam Height	H1200mm	刀带尺寸: Blade Length	L10750mm*W4.2mm*T0.65mm
切割泡绵密度: Cutting Foam Density	≤80kg/立方(误差±0.3~0.5mm) ≤80kg/CBM(+0.3-0.5mm)	控制方式: Control Type	全自动电脑控制 Computerized
切割速度: Cutting Speed	0~10米/分钟 0~10m/min	机器净重: Machine N.W	2300kg
工作台移动速度: Table Moving Speed	0~20米/分钟 0~20m/min	机器总功率: Total Motor Power	7.24kw
工作台运行方式: Table Moving Type	90°旋转或者来回行走方式(可选) 90° Rotatory Or Go And Back (To Be Requested)	占地尺寸: Floor Space	L5800mm*W3000mm*H2400mm

## ECMT-112D 数控异型切割机(新型振刀) CNC Contour Cutting Machine(High-Precision Oscillating Blade Type)

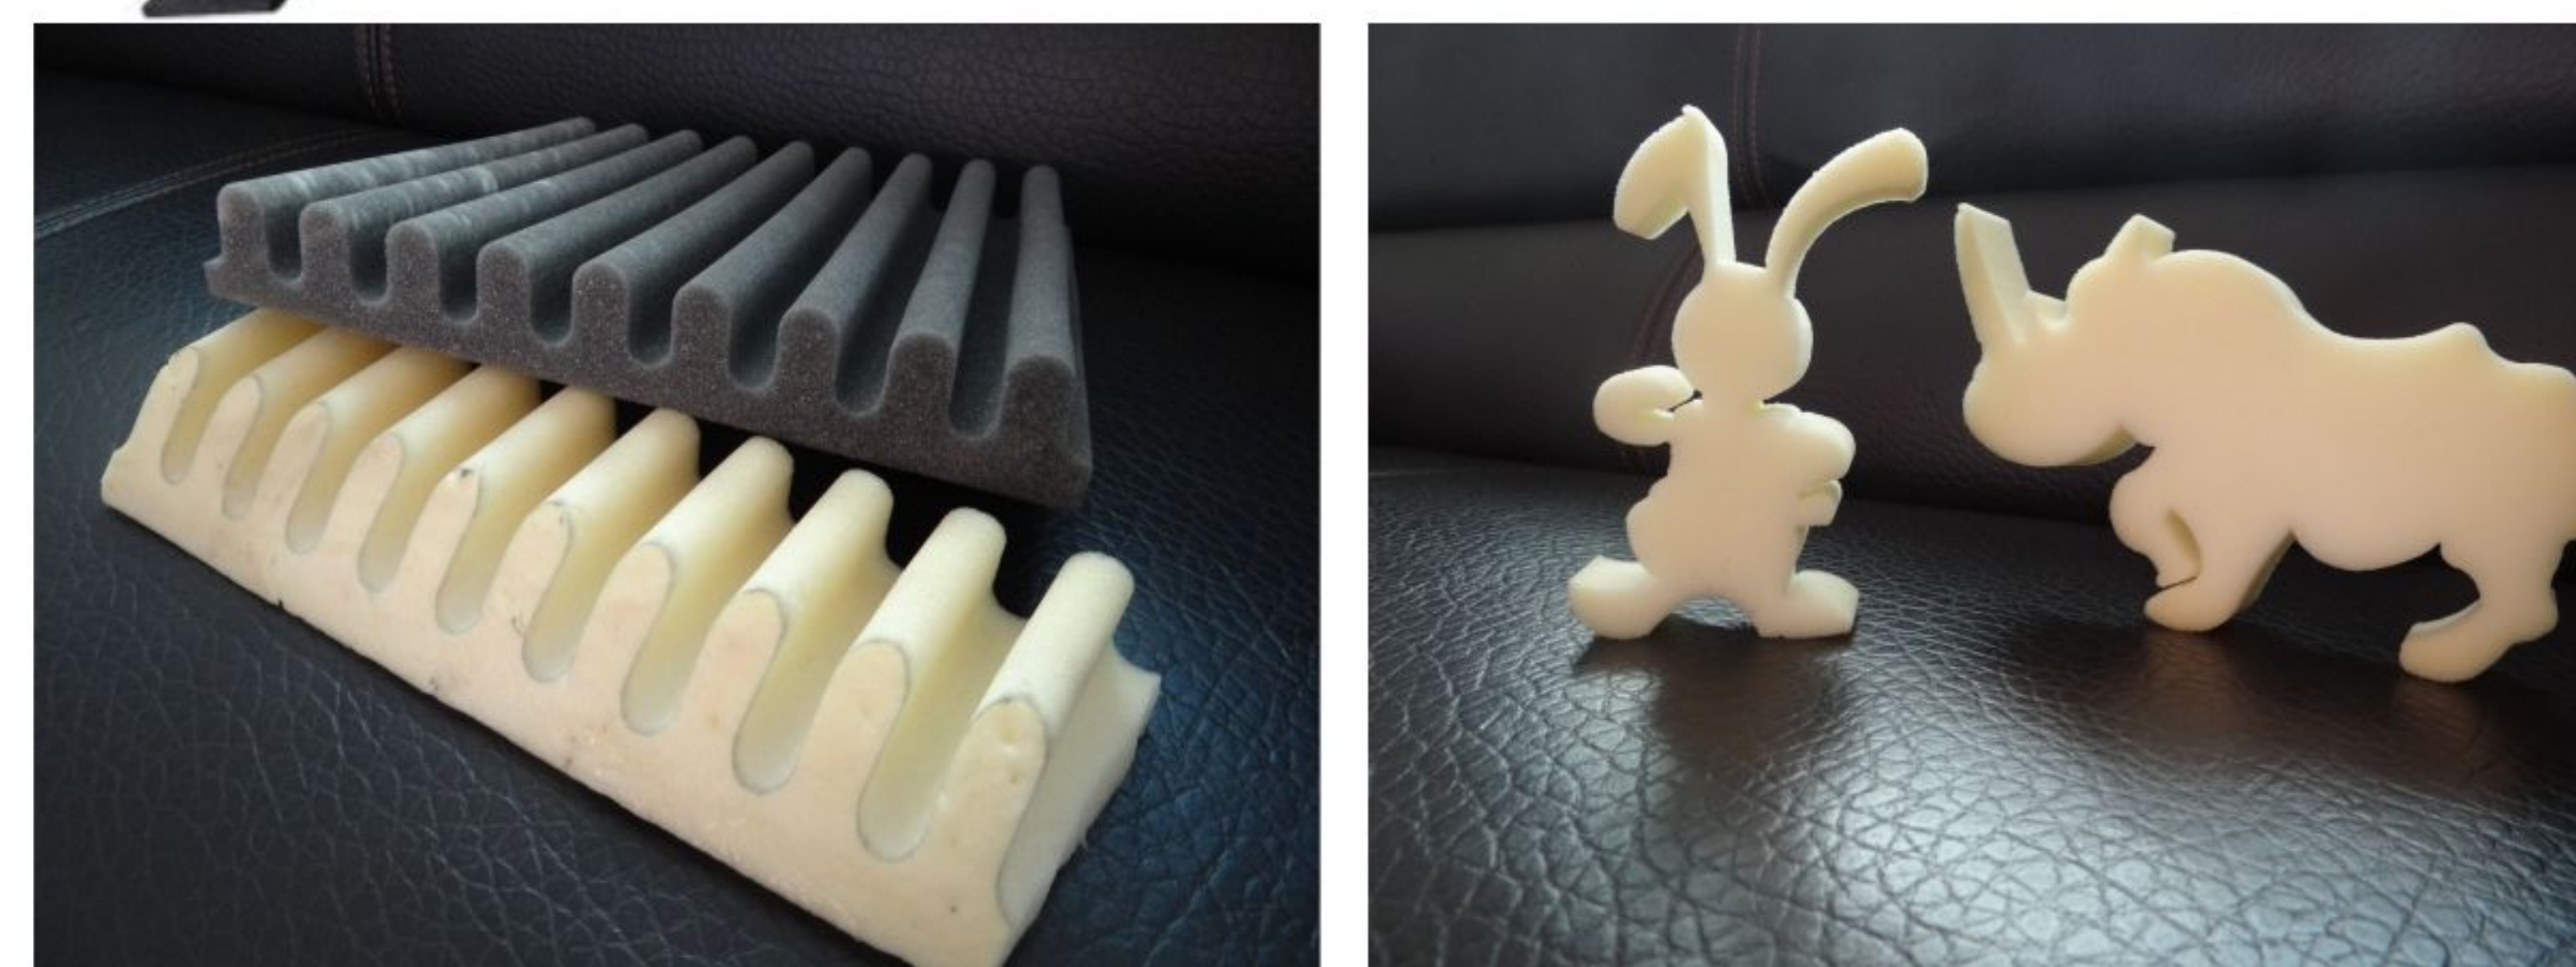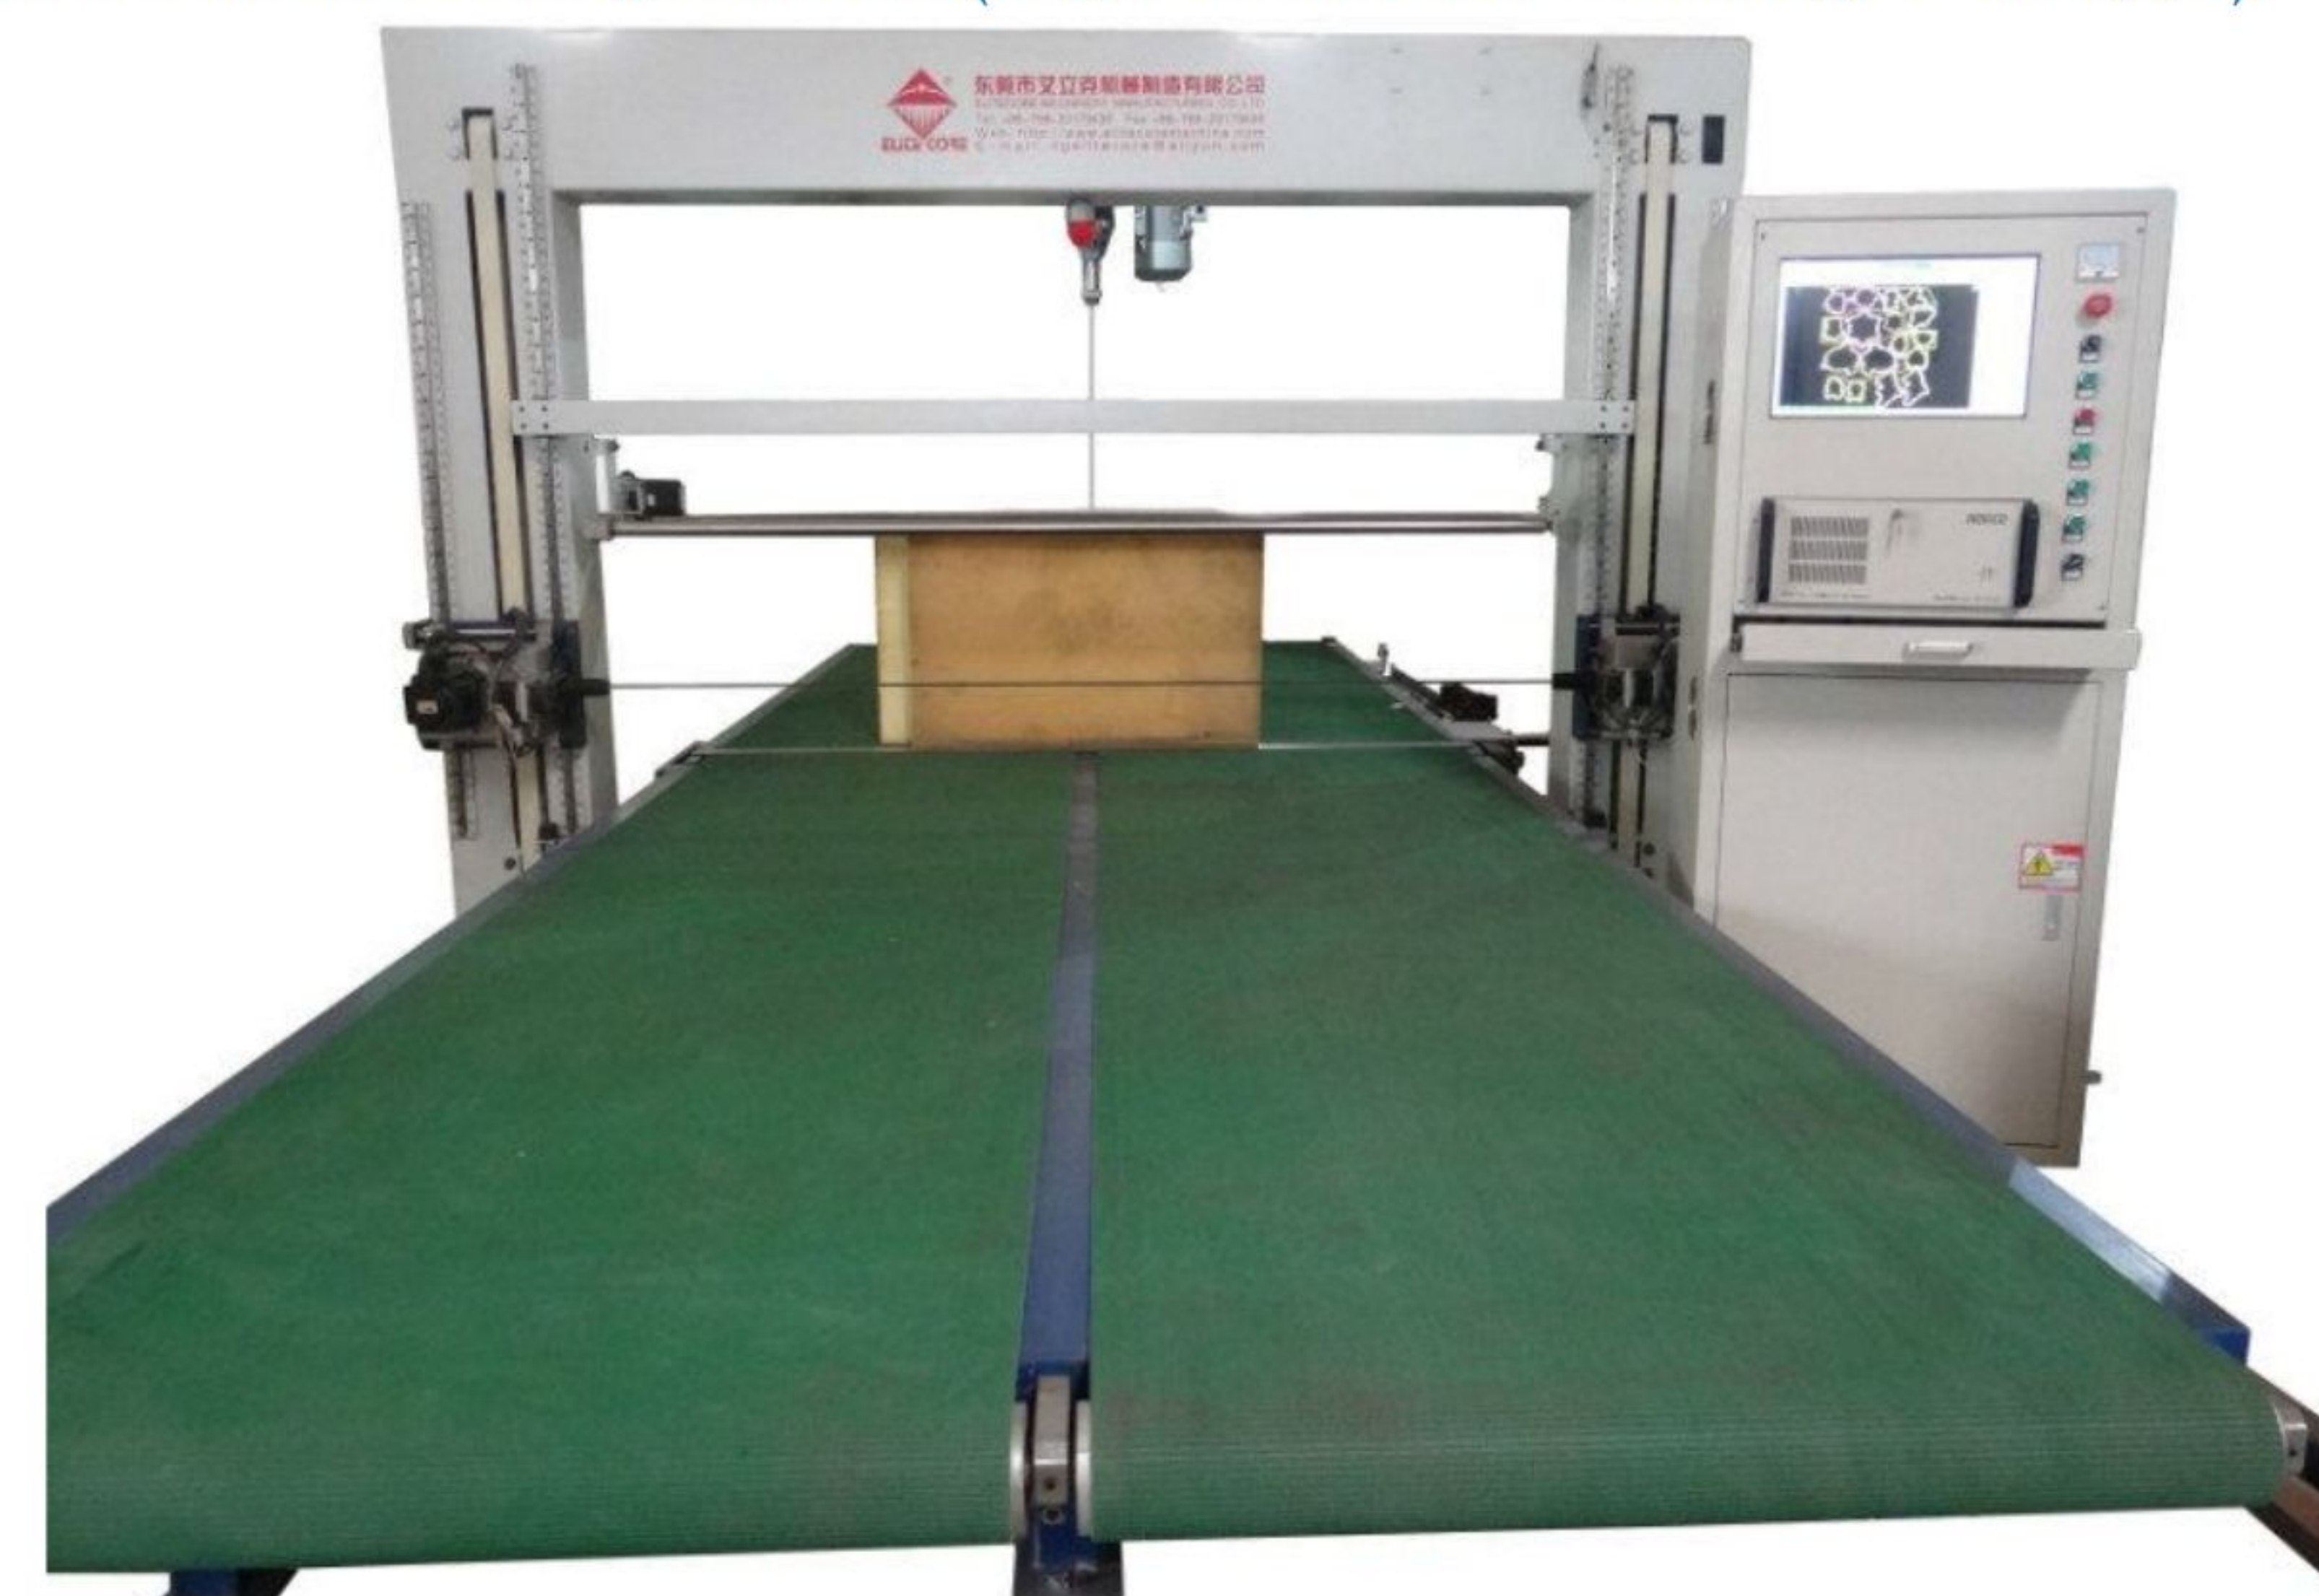

### 主要用途: Main Usage

本机采用全电脑数控，单/双振刀，横向/竖向切割，用于泡绵、泡沫体，PU、PE、PVC等软质材料的两维/三维图形的切割工作。

This Machine Computerized, Adopts Single/Double-Blade, Horizontal & Vertical Cutting Type Option, This Machine Special Used For 2D/3D Contour Shapes Cutting For Soft Materials Such As Foam Blocks, PU, PE, PVC etc.

### 主要技术参数: SPECIFICATION

有效切割泡绵尺寸: Cutting Foam Size	W2000mm*L3000mm OR W2000mm*L2000mm	单刀竖向二维图形运行方式: Single Blade Vertical 2D Moving Type	采用网带来回行走方式 Adopt Belt Moving Type
有效切割泡绵高度: Cutting Foam Height	H1200mm	双刀横/竖向二/三维图形运行方式: Double Blade Horizontal & Vertical 2D/3D Moving Type	采用网带来回行走方式 Adopt Belt Moving Table Type
切割泡绵密度: Cutting Foam Density	≤80kg/立方(误差±0.3~0.5mm) ≤80kg/CBM(+0.3-0.5mm)	控制方式: Control Type	全自动电脑控制+伺服系统 Computerized + Servo System
切割速度: Cutting Speed	0~10米/分钟 0~10m/min	切割方式: Cutting Type	振刀 Oscillating Blade Type
工作台移动速度: Table Moving Speed	0~10米/分钟 0~10m/min	机器净重: Machine N.W	2800kg
单刀横向二维图形运行方式: Single Blade Horizontal 2D Moving Type	采用网带来回行走方式 Adopt Belt Moving Type	机器总功率: Total Motor Power	9.14kw
单刀横/二/三维图形运行方式: Single Blade Horizontal 2D/3D Moving Type	采用旋转工作台方式 Rotatory Table Type	占地尺寸: Floor Space	L6200mm*W3200mm*H2400mm



## ECMT-113 113B 手动泡绵仿形切割机 Manual Contour Cutting Machine



### 主要用途: Main Usage

本机主要用于小块泡绵体的异型切割工作。同时也可以切割PU, PE, PVC等其它软质材料。  
This Machine is special used for Small Foam Blocks Contour Shapes Cutting. It is also can cut PU, PE, PVC etc.. And Other Soft Materials.

### 主要技术参数: SPECIFICATION

ECMT-113		ECMT-113B	
有效切割泡绵尺寸: Cutting Foam Size	L1500mm*W1200mm*H600mm	有效切割泡绵尺寸: Cutting Foam Size	L1500mm*W1500mm*H600mm
切割方式: Cutting Type	线刀切割 Wire Cutting Type	切割方式: Cutting Type	线刀切割 Wire Cutting Type
切割速度: Cutting Speed	0~30米/分钟 (手动可控) 0~30m/min(Manual Control)	切割速度: Cutting Speed	0~30米/分钟 (手动可控) 0~30m/min(Manual Control)
线刀长度: Wire Length	L7450mm*Dia1.3mm	线刀长度: Wire Length	L9050mm*Dia1.3mm
强力吸风装置: Suction Fan System	壹套*2.2kw One Set*2.2kw	强力吸风装置: Suction Fan System	壹套*2.2kw One Set*2.2kw
机器净重: Machine N.W.	900kg	机器净重: Machine N.W.	1000kg
电机总功率: Total Motor Power	4.1kw	电机总功率: Total Motor Power	4.1kw
占地尺寸: Floor Space	L2500mm*W3100mm*H1200mm	占地尺寸: Floor Space	L3000mm*W3100mm*H1200mm

## ECMT-118 泡绵接合机 Foam Sheets Jointing Machine

### 主要用途: Main Usage

本机主要用于泡绵薄片的接驳工作,本机可与ECMT-119配套使用,使接驳后的无限长泡绵薄片自动收卷,根据客户的要求计码收卷成成品以方便下一步的贴合用途或其它方面用途。

This Machine is used for Foam Sheets Jointing, It works with ECMT-119 together to Metering And Rewinding Jointed Long Foam Sheets Into Rolls Base on Customer's Need, And the Finished Rolls can be stocked for Future Laminating Use or Other Working use.

### 主要技术参数: SPECIFICATION

接驳泡绵尺寸: Jointing Foam Size:	W1000mm - W2150mm
接驳泡绵厚度: Jointing Foam Height:	T2mm - T20mm
接驳温度/速度: Jointing Temperature & Speed:	根据不同厚度要求手动可调 Adjustable(According to different Thickness)
光电感应: Sensor:	自动感应 Automatic
控制方式: Control Type:	气动控制 Pneumatic Control
机器净重: Machine N.W:	750kg
机器总功率: Total Motor Power:	2kw
占地尺寸: Floor Space:	L3000mm*W1000mm*H1500mm



## ECMT-119 泡绵卷料打码机 Foam Sheets Metering & Rewinding Machine

### 主要用途: Main Usage

本机主要用于泡绵薄片的收卷计码工作,本机可与ECMT-118配套使用,使接驳后的无限长泡绵薄片自动收卷,根据客户的要求计码收卷成成品以方便下一步的贴合用途或其它方面用途.本机也可以用其他行业像PVC, EVA, 薄膜, PE等片材的收卷计码工作。

This Machine is used for Foam Sheets Metering & Rewinding into Rolls, It works with ECMT-118 together to Metering And Rewinding Jointed Long Foam Sheets Into Rolls Base on Customer's Need, And the Finished Rolls can be stocked for Future Laminating Use or Other Working use, This Machine also can work for PVC Sheets, EVA Sheets, Plastic Film, PE Sheets etc.

### 主要技术参数: SPECIFICATION

加工尺寸: Working Materials Size:	W1000mm - W2150mm
卷料厚度: Rewinding Materials Thickness:	T1mm 以上 T1mm Up
卷料速度: Rewinding Speed:	0 - 80m(可调) 0~80m(Adjustable)
控制方式: Control Type:	电动控制 Automatic Electric Control
机器净重: Machine N.W:	1000kg
机器总功率: Total Motor Power:	1.5kw
尺寸: Floor Space:	L3000mm*W850mm*H1500mm





## ECMT-122 泡沫贴合机 Foam Laminating Machine

### 主要用途: Main Usage

本机采用单槽胶水贴合方式,主要用于泡绵和无纺布料,泡绵和PVC,PVC和无纺布料的贴合工作。

This Machine Adopts Gluing Laminating Type which is used for Foam Sheets & Non-Woven Fabric Laminating, Foam Sheets & PVC Sheets Laminating, PVC Sheets & Non-Woven Fabric Laminating...etc

### 主要技术参数: SPECIFICATION

不锈钢电发热管: Electric Heating Tube(Stainless Steel):	φ 60*1690mm
贴合宽度: Laminating Width:	W1500~W1800mm
产量: Output:	1~60码/分钟 1~60Yards/min
发热管功率: Heating Tube Power:	1.5kw*18个(总功率:27kw) 1.5kw*18pcs(Total:27kw)
发热管控制方式: Heating Tube Control Type:	双电机驱动控制 Bi-Motor Control
发热滚筒尺寸: Heating Roller Size:	Dia1500*W1830mm
贴合厚度范围: Laminating Thickness Range:	2mm~30mm
胶轮尺寸: Gluing Wheel Size:	Dia219mm*W1830mm
胶水槽类型: Glue Groove Type:	单槽 Single Groove
控制方式: Control Type:	自动控制 Automatic Electric Control.
机器净重: Machine N.W.:	4000kg
机器总功率: Total Motor Power:	32kw
占地尺寸: Floor Space:	L6800mm*W2200mm*H2600mm



## ECMT-144B 泡沫火焰贴合机 Foam Laminating Machine(Flame Type)

### 主要用途: Main Usage

本机采用火焰贴合方式,主要用于泡绵和无纺布料,泡绵和PVC,PVC和无纺布料的贴合工作。


This Machine Adopts Flame Laminating Type which is used for Foam Sheets & Non-Woven Fabric Laminating, Foam Sheets & PVC Sheets Laminating, PVC Sheets & Non-Woven Fabric Laminating...etc

### 主要技术参数: SPECIFICATION

贴合宽度: Laminating Width:	W1800mm
产量: Output:	1~60码/分钟 1~60Yards/min
气体类型: Gas Type:	天然气 Natural Gas Available
控制方式: Control Type:	电动控制 Electric Control
点火方式: Ignition Method:	使用手动点火枪 Use Lighting Gun By Manually
贴合厚度范围: Laminating Thickness Range:	2mm ~ 10mm
排废气装置: Suction Fan Device:	壹套*1.5kw One Set*1.5kw
机器净重: Machine N.W.:	3100kg
机器总功率: Total Motor Power:	6kw
占地尺寸: Floor Space:	L8000mm*W3200mm*H2400mm



## ECMT-123 自动泡沫圆切机 Automatic Foam Peeling Machine

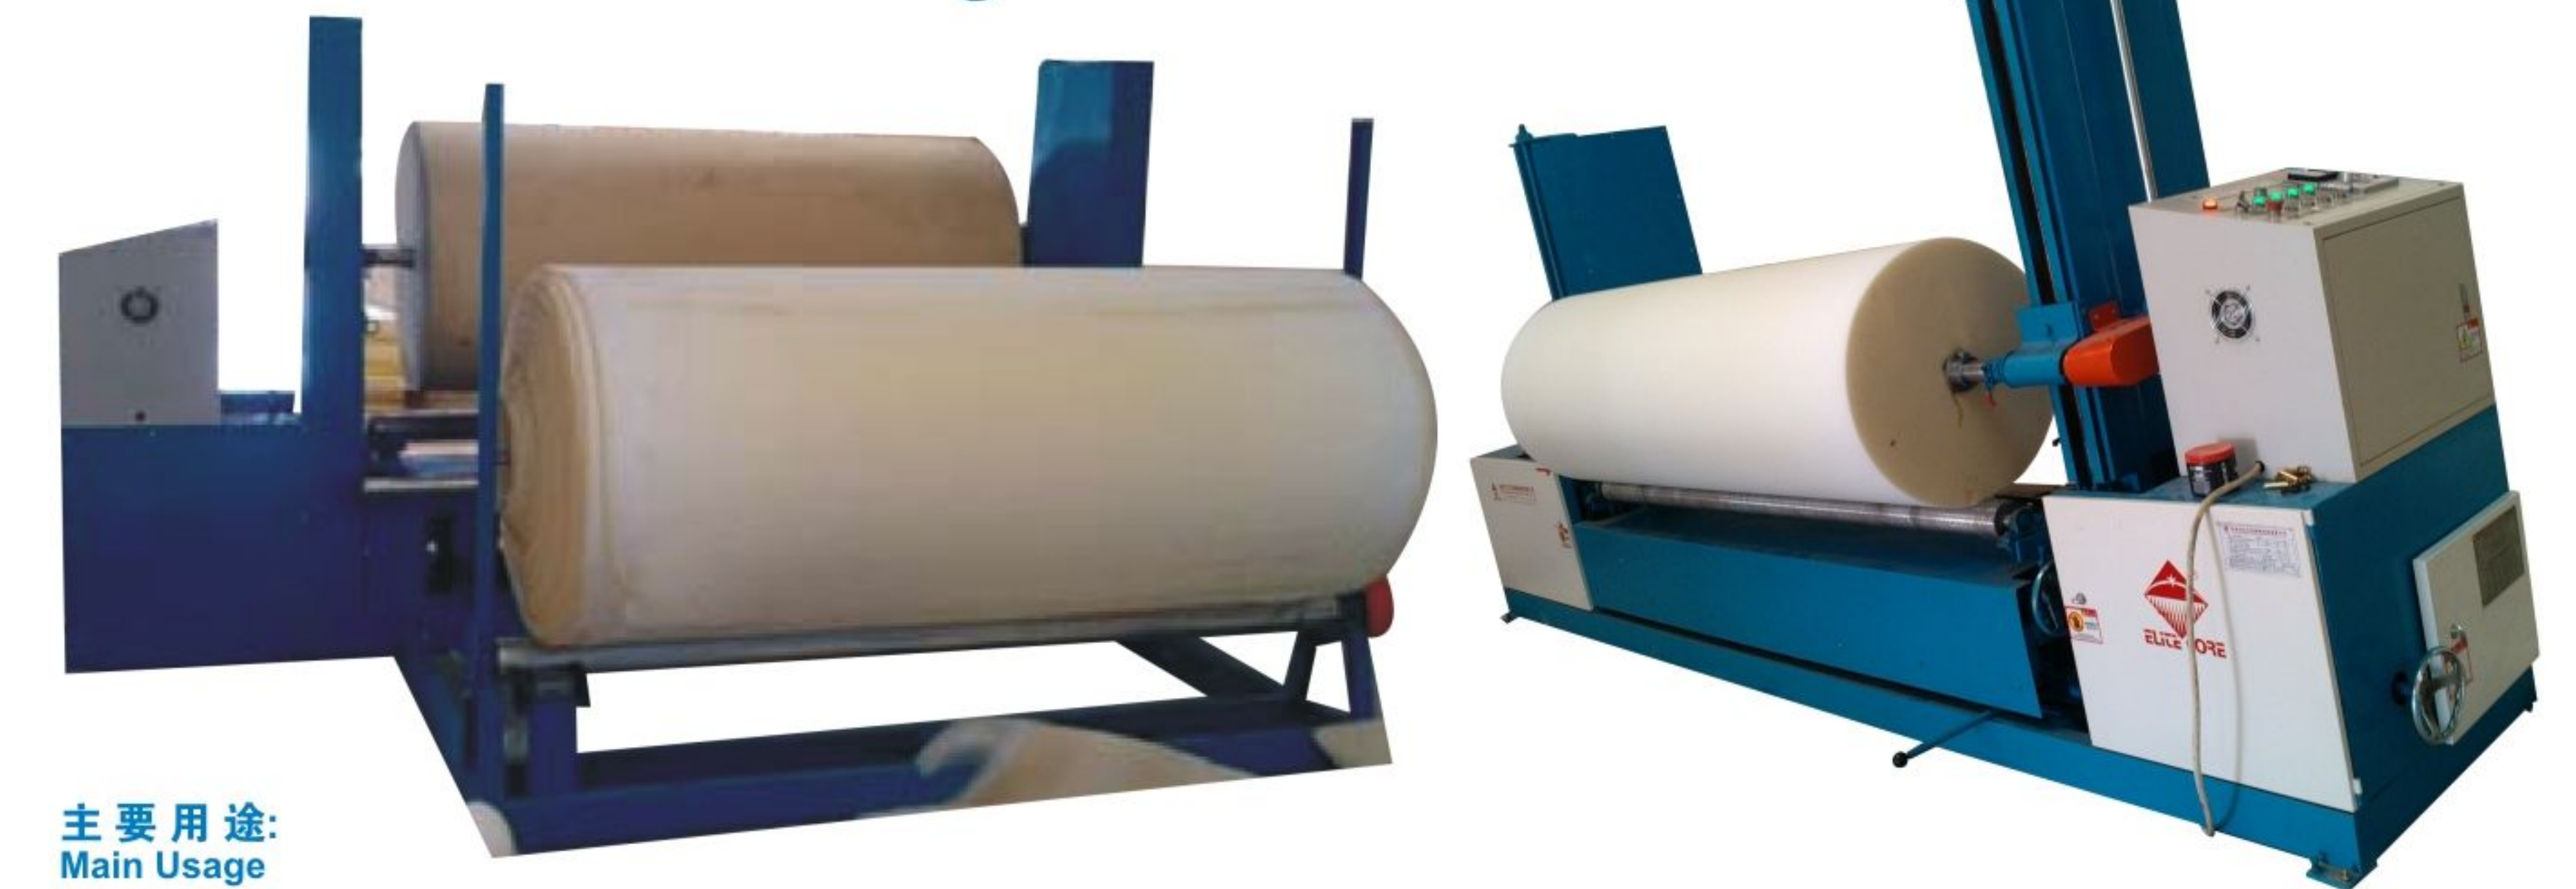

### 主要用途: Main Usage

本机主要用于圆形泡沫体的切片工作,与泡沫打孔机配套使用,加工的无限长泡沫薄片可通过自动收料装置根据客户的要求码收卷成成品以便下一步的贴合用途或其它方面用途。

This Machine is used to Peel Round Foam Blocks Into Continuous Long Sheets, It can Winding & Metering Into Rolls According to Customer's Requests, This Machine must be used together with ECMT-124/124B/125 Foam Boring Machine, The finished Foam Rolls can be used for market directly, Or For Further Lamination Works of Foam Laminating Machines, Or For Further Mattress Cover Quilting of Quilting Machines.

### 主要技术参数: SPECIFICATION

切割泡沫尺寸: Cutting Foam Size	Dia2000mm*W2150mm	切割厚度设置: Cutting Thickness Adjustment	手动更换厚度齿轮 Adjust Thickness Wheels By Manual
切割速度: Cutting Speed	0~50米/分钟(可调) 0~50m/min(Adjustable)	控制方式: Control Type	电动控制 Automatic Electric Control
切割刀带尺寸: Cutting Blade Size	L9160mm*W30mm*TO.45mm	机器净重: Machine N.W	2000kg
卷料速度: Rewinding Speed	0~50米(可调) 0~50m(Adjustable)	机器总功率: Total Motor Power	4.87kw
切割厚度范围: Cutting Thickness Range	2mm~25mm	占地尺寸: Floor Space	L4800mm*W1750mm*H1700mm

## ECMT-124 卧式泡沫打孔机 Horizontal Foam Boring Machine


### 主要用途: Main Usage

本机主要用于圆形泡沫体的中心穿孔工作,穿孔后的泡沫体用于泡沫圆切机的进一步加工无限长泡沫薄片用途。

This Machine is used to Punch The Central Holes Of Round Foam Blocks, Punched Round Foam Blocks For Further Foam Peeling Machine Use.

### 主要技术参数: SPECIFICATION

打孔直径: Punching Diameter:	Dia45mm
轴转速: Axis Turning Speed:	230r/min
加工泡沫尺寸: Punching Foam Block Size:	Dia2000mm*L2150mm
打孔速度: Punching Speed:	0~30m/min
控制方式: Control Type:	手动调节工作台进料和打孔轴升降 Punching Axis & Table Moving Adjust By Manual
总电机功率: Total Motor Power:	1.1kw
机器净重: Machine N.W.:	800kg
占地尺寸: Floor Space:	L5700mm*W1400mm*H1800mm

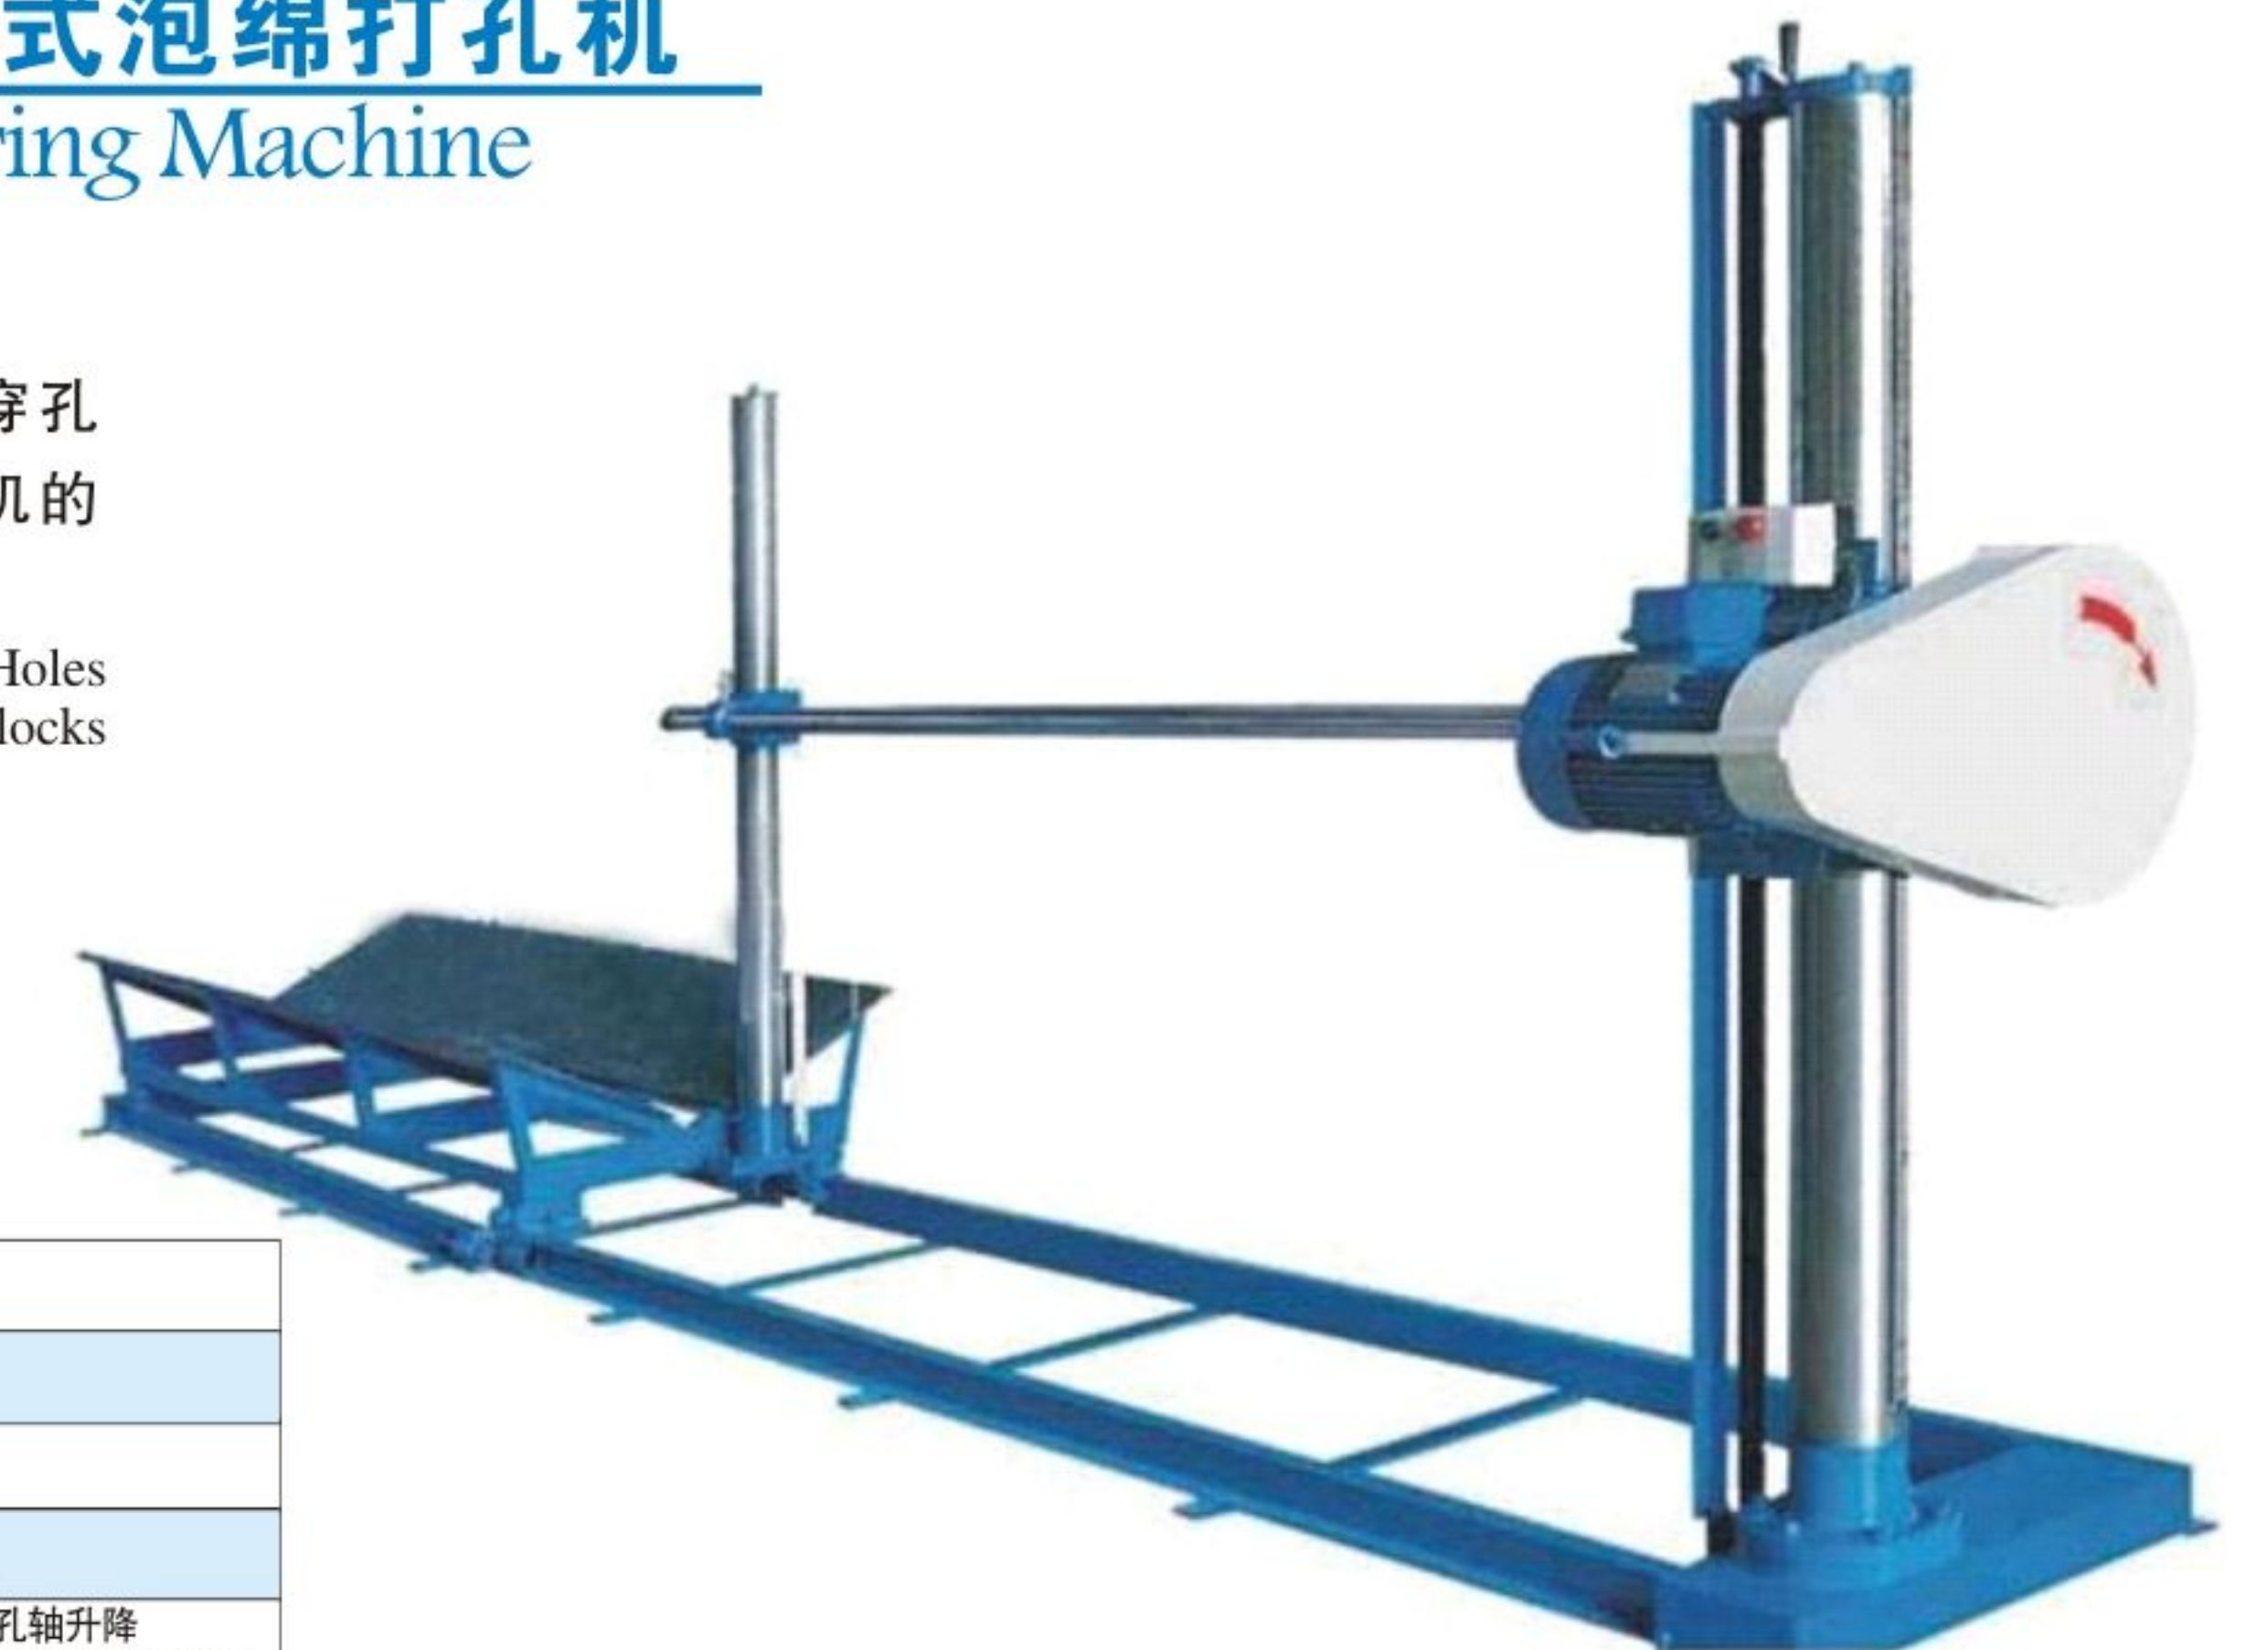



## ECMT-125 立式泡绵打孔机 Vertical Foam Boring Machine

### 主要用途: Main Usage

本机主要用于圆形泡绵体的中心穿孔工作,穿孔后的泡绵体用于ECMT-123/123B泡绵圆切机的进一步加工无限长泡绵薄片用途。

This Machine is used to Punch The Central Holes Of Round Foam Blocks, Punched Round Foam Blocks For Further ECMT-123/123B Foam Peeling Machine Use.

### 主要技术参数: SPECIFICATION

打孔直径: Punching Diameter:	Dia45mm
轴转速: Axis Turning Speed:	230r/min
加工泡绵尺寸: Punching Foam Block Size:	Dia2000mm*H2200mm
打孔速度: Punching Speed:	0 - 30m/min
控制方式: Control Type:	电动调节打孔轴升降 Punching Axis Adjust By Electric Control
总电机功率: Total Motor Power:	2.25kw
机器净重: Machine N.W.:	1200kg
占地尺寸: Floor Space:	L1400mm*W2300mm*H5500mm



## ECMT-125B 立式泡绵打孔切顶机 Vertical Foam Boring & Top Cutting Machine

### 主要用途: Main Usage

本机主要用于圆形泡绵体的中心穿孔和顶部切割工作,穿孔后的泡绵体用于泡绵圆切机的进一步加工无限长泡绵薄片用途。

This Machine is used to Punch The Central Holes Of Round Foam Blocks & Specia Design With Horizontal Top Cutter For Foam Blocks Top Skin Cutoff, Punched Round Foam Blocks For Further ECMT-123/123B Foam Peeling Machine Use.

### 主要技术参数: SPECIFICATION

打孔直径: Punching Diameter	Dia45mm
轴转速: Axis Turning Speed	230r/分钟
加工泡绵尺寸: Punching Foam Block Size	Dia2000mm*H2200mm
打孔速度: Punching Speed	0~30米/分钟 0~30m/min
打孔轴控制方式: Punching Axis Control Type	电动调节打孔轴升降 Punching Axis Adjust By Electric Control
顶部切割尺寸: Cutting Size	Dia2000mm*H1800mm~H2150mm
切割控制方式: Cutting Control Type	电动控制 Electric Control
总电机功率: Total Motor Power	5.5kw
机器净重: Machine N.W.	1500kg
占地尺寸: Floor Space	L1400mm*W2500mm*H5500mm



## ECMT-126 再生绵机 Re-bonded Foam Making Machine

### 主要用途: Main Usage

本机与破碎机配套使用,使破碎后的泡绵废料重新利用回收做成再生绵使用。

This Machine works with Foam Shredding Machine for Rebonded Foam producing.

### 主要技术参数: SPECIFICATION

搅拌罐容积: Mixing Tank Capacity:	10立方 10CBM
产量: Output:	2 - 3个/天 2-3Blocks/day
搅拌速度: Mixing Speed:	0 - 50rpm
搅拌电机功率: Mixing Motor Power:	5.5kw
油缸压力: Oil Hydraulic Pressure:	12吨 12Ton
可再生绵密度范围: Re-bonded Foam Density Range:	0 - 120kg/CBM
配两套方模: Match Two Square Moulds Size:	L2050mm*W1600mm*H1000mm(可按客户要求定做) L2050mm*W1600mm*H1000mm(To Be Reuqested)
控制方式: Control Type:	电动控制 Electric Control
机器净重: Machine N.W.:	4000kg
机器总功率: Total Motor Power:	11kw
占地尺寸: Floor Space:	L6000mm*W3600mm*H5200mm



## ECMT-141 蒸汽再生绵机 Re-bonded Foam Making Machine(With Steam System)



### 主要用途: Main Usage

本机与破碎机配套使用,使破碎后的泡绵废料重新利用回收做成再生绵使用,本机加装蒸汽系统可使成型的再生绵快速化,使生产效率更高。

This Machine works with Foam Shredding Machine for Rebonded Foam producing.It

### 主要技术参数: SPECIFICATION

搅拌罐容积: Mixing Tank Capacity	10立方 10CBM	可选配自动上料系统: Option Of Auto Materials Loading System	配置国产上料泵 (本配置可选配) 储料桶容积: 100L*1个 Storage Tanks:100kg*1pc.Match With Chinese Pump For Materials Loading.(Choose Available)
产量: Output	10~16个/天 10~16 Blocks/day	控制方式: Control Type:	电动控制 Electric Control
搅拌速度: Mixing Speed	0~50圈 0~50rpm	蒸汽锅炉容积: Boiler Capacity	100kg
搅拌电机功率: Mixing Motor Power	5.5kw	机器净重: Machine N.W	4500kg
油缸压力: Oil Hydraulic Pressure	12吨 12Ton	机器总功率: Total Motor Power	11.75kw
可再生绵密度范围: Re-bonded Foam Density Range	0~120kg/CBM	占地尺寸: Floor Space	L6000mm*W3600mm*H5500mm
配油缸方模一套: One Hydraulic Square Mould Size	L2050mm*W1600mm*H1000mm(可按客户要求定做) L2050mm*W1600mm*H1000mm(To Be Reuqested)		



## ECMT-141B 全自动蒸汽再生绵生产线 Fully-Auto Re-bonded Foam Making Machine (With Steam System)

### 主要用途: Main Usage

本机配备全自动储存系统, 全自动电子称重系统, 全自动胶水喷洒系统, 全自动双油缸压模和蒸汽系统, 此机具有质量稳定, 操作简单方便, 节省人工, 生产效率比一般的单油缸压模再生机翻好几倍。

This Machine designed with Fully Auto Storage Tank System, Fully Auto Scale System, Fully Auto Chemical Feeding & Spray System, Fully Auto Double Hydraulic Press System & Fully Auto Steam System, Its for high quality rebonded foam production, Operation is simple and easy, production efficiency is very higher than normal type.



### 主要技术参数: SPECIFICATION

搅拌罐容积: Mixing Tank Capacity:	10立方 10CBM
产量: Output:	30~45个/天 30~45Blocks/day
搅拌速度: Mixing Speed:	0~50rpm
搅拌电机功率: Mixing Motor Power:	5.5kw
油缸压力: Oil Hydraulic Pressure:	40吨 40Ton
可再生绵密度范围: Re-bonded Foam Density Range	0~120kg/CBM
配自动方模二套: Two Automatic Square Mould Size:	L2050mm*W1600mm*H1600mm(可按客户要求定做) L2050mm*W1600mm*H1600mm(To Be Reuquested)
自动存储系统: Auto Storage Tank System:	Dia2000mm*H6000mm
可选配自动上料系统: Option Of Auto Materials Loading System:	储料桶容积:100kg*1个,配置国产上料泵 Storage Tanks:100kg*1pc,Match With Chinese Pump
控制方式: Control Type:	全自动控制 Automatic Electric Control.
蒸汽锅炉容积: Boiler Capacity:	200kg
机器净重: Machine N.W:	8000kg
机器总功率: Total Motor Power:	19.5kw
占地尺寸: Floor Space:	L9000mm*W3600mm*H7500mm

## ECMT-127C 多功能型强力泡绵边角料破碎机 Heavy-Duty Scrap Foam Shredding Machine (Multifunction)

### 主要用途: Main Usage

本机采用片型刀架方式,采用4排固定刀及水冷却循环系统设计, 产量较普通机型高50%80以上, 可用于泡绵边角料,PU,PE,PVC,EVA,TPR,TPE,PP,PE,绗缝面料及各种塑料制品的破碎工作。

This Machine Adopts Knife Shredding Type,use with four rolls stationary knife and re-circulating cooling water system,and its production more than the normal 50-80%. Which used for foam Scraps ,PU,PE,PVC,EVA,TPR,TPE,PP,PE ,Quilted Fabric Materials And All Kinds Of Plastic Materials Shredding.

### 主要技术参数: SPECIFICATION

破碎速度: Crushing Speed:	300~800kg/hr
产量: Output:	300~800kg/hr
破碎厚度范围: Shredding Thickness Range:	1mm~30mm
配厚度塞网: Matched Thickness Mesh:	Φ 8mm, Φ 18mm, Φ 30mm(可根据客户要求配置) Dia8mm, Dia18mm, Dia30mm(To Be Requested)
抽风装置: Suction Fan System:	壹套*5.5kw One Set*5.5kw
控制方式: Control Type:	电动控制 Electric Control
冷却系统: Cooling System:	装有冷水循环系统 With Water Cooling System)
机器净重: Machine N.W:	1100kg
机器总功率: Total Motor Power:	37kw
占地尺寸: Floor Space:	L1800mm*W1500mm*H1200mm



## ECMT-127 泡绵边角料破碎机 Scrap Foam Shredding Machine

### 主要用途: Main Usage

本机采用垂片刀破碎方式,用于泡绵边角料的破碎工作。

This Machine used for for foam Scraps Shredding.

### 主要技术参数: SPECIFICATION

破碎速度: Shredding Speed:	100kg - 400kg/hr
产量: Output:	100kg - 400kg/hr
破碎厚度范围: Shredding Thickness Range:	1mm - 30mm
配厚度塞网: Matched Thickness Mesh:	Φ 8mm, Φ 18mm, Φ 30mm(可根据客户要求配置) Dia8mm, Dia18mm, Dia30mm(To Be Requested)
抽风装置: Suction Fan System:	壹套 One Set
控制方式: Control Type:	电动控制 Electri Control
机器净重: Machine N.W:	600kg
机器总功率: Total Motor Power:	22kw
占地尺寸: Floor Space:	L3000mm*W1200mm*H1200mm



## ECMT-147 泡绵冲孔机 Foam Hole Punching Machine

### 主要用途: Main Usage

泡绵床垫冲孔机主要适用于海绵床垫,海绵枕头的冲孔生产,生产效率更高,更节省人力,更好的代替了效率低的油压机。

Foam Mattress Punching Machine is used for punching working of foam mattress ,foam pillow,the working efficiency is more high , less manpower , its more better to instead of hydraulic machine .

### 主要技术参数: SPECIFICATION

有效加工床垫最大宽度: Max Mattress Process Width:	W2200mm
有效加工床垫最大高度: Max Mattress Process Height:	200mm
加工速度: Process Speed:	6次/分钟 6 times/min
冲针直径: Needle Diameter:	Dia 7.5mm
孔径: Machine N.W:	30mm*30mm
机器净重: Hole Diameter:	3000kg
占地尺寸: Floor Space:	L3800mm*W3000mm*H2400mm





## ECMT-133 泡沫储存输送系统 Foam Storage Rack System

### 主要用途: Main Usage

本机主要用于将无限长的泡沫输送到海绵储存箱(尺寸、规格及布局根据客户要求现场定做)

This Machine Is Used For Transfer The Long Foam Blocks to Foam Rack Storage System.(Size & Layout To Be Requested)



## ECMT-132 泡沫夹具 Crane Unit

### 主要用途: Main Usage

本机主要用于连续发泡线上无限长泡沫体的搬运用途。

This Machine is used for Moving The Long Foam Blocks From The Continuous Foaming Machine Productions.

### 主要技术参数: SPECIFICATION

标准规格: Standard Size	L50m*W2400mm*H1500mm(尺寸可根据客户要求定做) L50m*W2400mm*H1500mm(Or Size To Be Requested)
夹绳尺寸: Working Foam Size	L50m*W1000mm~W2300mm*H1250mm(夹绳尺寸可根据客户要求定做) L50m*W1000mm~W2300mm*H1250mm(Or Size To Be Requested)
夹绳速度: Working Speed	0~10米/分钟 0~10m/min
控制方式: Control Type	自动控制 Automatic Electric Control.
机器净重: Machine N.W	6500kg
机器总功率: Total Motor Power	6kw
占地尺寸: Floor Space	L50m*W2600mm*H1700mm



## ECMT-142 泡沫压缩打包机 Foam Mattress Compress & Packing Machine

### 主要用途: Main Usage

本机主要用于泡沫体和泡沫床垫的压缩封边打包工作。  
This Machine is used for Foam Blocks & Foam Mattress Compressing, Sealing then Packing into small Capacity.

### 主要技术参数: SPECIFICATION

油缸压力: Oil Hydraulic Pressure	20吨 20Ton	封边装置: Sealing System	套套 1 Set
加热温度: Heating Temperature	0~200℃	最大封边宽度: Max.Sealing Width	W2100mm
工作台尺寸: Working Table Size	L2100mm*W2200mm*H600mm	控制方式: Control Type	自动控制 Automatic Electric Control
升降行程: Lifting Distance	H100~H600mm	机器净重: Machine N.W	4500kg
工作速度: Working Speed	0~25m	机器总功率: Total Motor Power	1.5kw
油缸容积: Oil Hydraulic Capacity	300L	占地尺寸: Floor Space	L2500mm*W2300mm*H3000mm



## ECMT-145 泡沫压缩破泡机 Foam Exhausting Machine

### 主要用途: Main Usage

本机主要用于发泡未完全成熟的泡沫体的压缩及破泡工作。经过此设备处理过的泡沫体手感更加柔软,弹性度更好。

This Machine is used for second time process for Unshaped/Immatured Foam Block, It can Extrude the Foam-Air-Holes to be Closed and Exhausted. To make the Foam Blocks More Soft Quality And More Elastic Quality.

### 主要技术参数: SPECIFICATION

加工泡沫尺寸: Working Foam Size	W1000mm~2150mm
加工泡沫厚度: Working Foam Height	H0~H350mm
工作速度: Working Speed	0~30m/min
压辊方式: Press-Roller Type	双排两组4条压辊 Double Row(4 Rollers)
控制方式: Control Type	自动控制 Automatic Electric Control
机器净重: Machine N.W	2500kg
机器总功率: Total Motor Power	4kw
占地尺寸: Floor Space	L3000mm*W2500mm*H1800mm



## ECMT-206B 床垫围边机 Tape Edge Machine

### 主要用途: Main Usage

本机主要用于各种规格床垫上、下面料与侧面料之间的边缝,也适用于其它软床垫、睡袋、帐篷的缝制。

This Machine Adopts Sewing Head Moving And Working Table Fixing And Mainly Used For Tape Edge Sewing For All Kinds Of Soft Mattresses, Sleep Bag, And Tents.

### 主要技术参数: SPECIFICATION

速度控制: Speed Control Type:	变频无级调速 Adopts Inverter Control
转角速度: Corner Speed:	转角自动减速 Auto Decelerate.
工作台尺寸: Table Size:	W1500mm*L1950mm
缝纫机头型号: Sewing Head Type:	Choose Available ;可选择: Chinese Head (Lockstitch) 国产标准有梭机头 Seiko Head (Lockstitch) 日本精工有梭机头 Singer Head (Chainstitch) 胜家无梭机头
机头角度调节范围: Working Angle Of Sewing Head:	35° ~ 55°
缝纫床垫厚度范围: Sewing Mattress Height:	30mm ~ 300mm
工作台升降方式: Table Lifting Type:	电动可调 Electric Adjustable
机头转速: Sewing Head Speed:	1100~3000rpm
工作台移动速度: Table Moving Speed:	5.5m~16m(可调) 5.5m~16m(Adjustable)
产量: Output:	8~15pcs/hr
总电机功率: Total Motor Power:	1.16kw
机器净重: Machine N.W:	900kg
占地尺寸: Floor Space:	L2200mm*W1900mm*H1500mm

